


Store 3 ESALED 60°



CLD
CELL

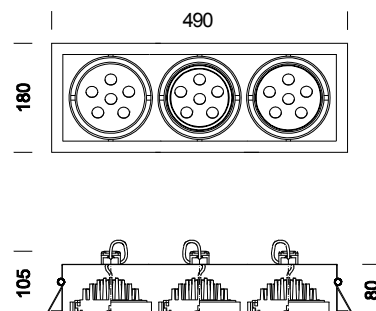

IP20

IK07



Code	Gear	Kg	Colour	Dimensions	W Tot	lamp
22181412-00	CLD CELL	2.50	white	490x180x105	54	ESALED-2000lm @ 1A-4000K - 60°-CRI 80
22181472-00	CLD CELL	2.50	met. silver	490x180x105	54	ESALED-2000lm @ 1A-4000K - 60°-CRI 80
22180412-00	CLD CELL	2.50	white	490x180x105	54	ESALED-1800lm @ 1A-3000K - 60°-CRI 80
22180472-00	CLD CELL	2.50	met. silver	490x180x105	54	ESALED-1800lm @ 1A-3000K - 60°-CRI 80

Coating: Fluid-coated with a humidity resistant, UV-stabilised acrylic-resin paint, interior part is black and the border is white .

Equipment: Supplied with springs ensuring perfect adherence to 1 to 25 mm thick false ceilings.

Terminal block: maximum allowed lead cross section 1,5mm²

Regulations: Manufactured in accordance with EN 60598-1-CEI 34-21 standards. Degree of protection in accordance with EN60529 standard.

ESALED: 3000/4000K - 1050mA - 60° - 1500/1800lm - CRI 80