



Download


DXF 2D
- shop33.dxf

Montaggi
- SHOP_PLA rev2.pdf



Shop 3 LED

Housing: in aluminium with adjustable and rotating spotlights.
Equipment: complete with springs for false ceilings having a thickness from 1mm to 25 mm.
Standards: manufactured pursuant to EN 60598-1-CEI 34.21 standards and with a degree of protection pursuant to EN 60529.
DIMM IGBT
Power factor: ≥ 0.95
Luminous flux maintenance 70% 50000h (L70B50)
Photobiological safety class: exempt group EN62471.
Lower lamp wattages means greater economy, more than 80% saving

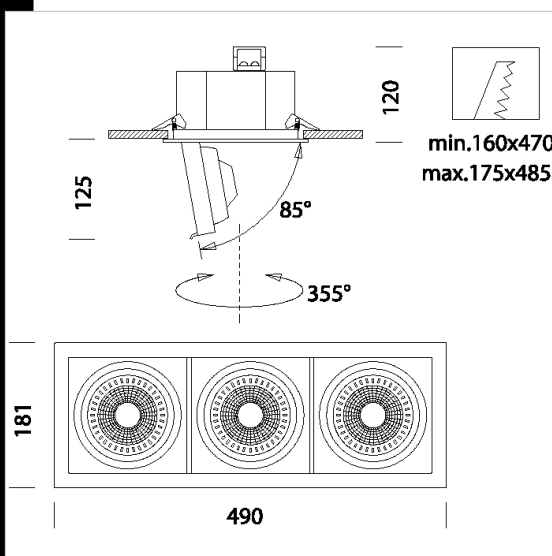

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22180613-00	CLD CELL-DI	2,54	LED COB3x-1766lm-3000K-38°-CRI 93	57 W	BIANCO
22180613-68	CLD CELL-DI	2,42	LED COB3x-1890lm-4000K-38°-CRI 93	57 W	BIANCO
22180613-1241	CLD CELL-D-D	2,50	LED COB3x-1766lm-3000K-38°-CRI 93	57 W	BIANCO
22180613-6841	CLD CELL-D-D	2,50	LED COB3x-1890lm-4000K-38°-CRI 93	57 W	BIANCO
22180613-09	CLD CELL-DI-E	2,90	LED COB3x-1766lm-3000K-38°-CRI 93	57 W	BIANCO
22180613-6809	CLD CELL-DI-E	2,90	LED COB3x-1890lm-4000K-38°-CRI 93	57 W	BIANCO
22180613-31	CLD CELL-DI-E	2,90	LED COB3x-1766lm-3000K-38°-CRI 93	57 W	BIANCO
22180613-3113	CLD CELL-DI-E	2,90	LED COB3x-1890lm-4000K-38°-CRI 93	57 W	BIANCO

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated