



Download

DXF 2D
- shop44.dxf

Montaggi
- shopled.pdf



Shop 4 LED

Housing: in aluminium with adjustable and rotating spotlights.
Equipment: complete with springs for false ceilings having a thickness from 1mm to 25 mm.

Standards: manufactured pursuant to EN 60598-1-CEI 34.21 standards and with a degree of protection pursuant to EN 60529.

DIMM IGBT


LED COB 17W - 3000K - 2000lm - CRI 93 - 38°

Power factor: >= 0.95

Luminous flux maintenance 70% 50000h (L70B50)

Photobiological safety class: exempt group EN62471.

Lower lamp wattages means greater economy, more than 80% saving

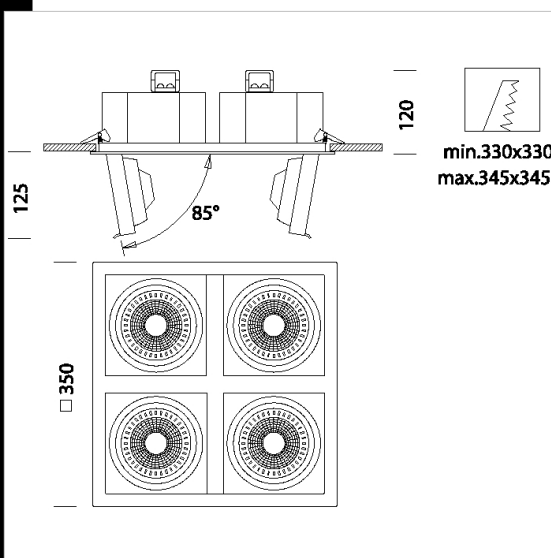

Code	Gear	Kg	Watt	Base	Lamps	Colour
22180614-00	CLD CELL-DI	3,42	LED COB 17W		2000lm-3000K - 38°-CRI 93	WHITE