



Download
DXF 2D
- 181213a.dxf



Store 2

The STORE a new beam optic unit has been created with CDM and/or AR111 lamps.
Installation has been improved too, by a springs system, making recessed installation faster and easier.

Coating: Fluid-coated with a humidity resistant, UV-stabilised acrylic-resin paint, interior part is black and the border is white .

Lampholder: Ceramic with silver-plated contacts.


Electric gear: Equipped without transformer and silicon cable, cross section 0.75 mm².

Equipment: Supplied with springs ensuring perfect adherence to 1 to 25 mm thick false ceilings.

Terminal block: maximum allowed lead cross section 1,5mm²

Lamp: Complete with halogen lamps and/or ceramic metal halide lamp.

Regulations: Manufactured in accordance with EN 60598-1-CEI 34-21 standards. Degree of protection in accordance with EN60529 standard.

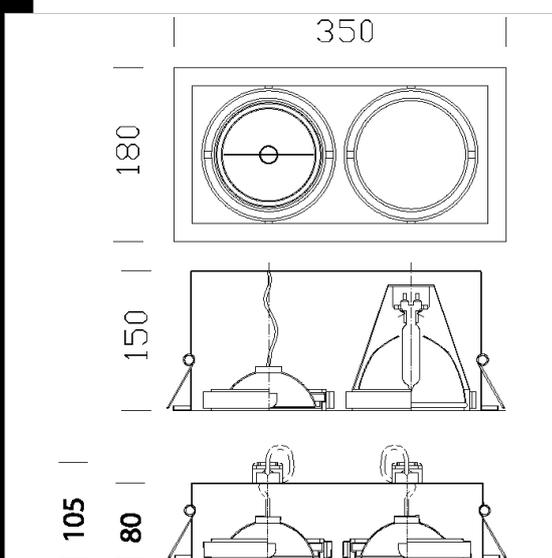

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
22181213-00	CTL+CELL	2.45	AR111 75 + CDM-T 70---	163 W	G53+G12	WHITE
22181214-00	CELL	2.70	CDM-T 2x70-6600lm-3000K-Ra 1b	156 W	G12	WHITE
22181274-00	CELL	2.70	CDM-T 2x70-6600lm-3000K-Ra 1b	156 W	G12	SILVER

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated