Download

DXF 2D
- cover1.dxf

Montaggi
- COVERLIGHT 1-2-3-4 rev0.pdf

Cover light 1 - round

Housing: Extruded aluminium.
Reflector: Adjustable angle frosted opal polycarbonate diffuser
LED: Power factor >= 0,95
Luminous flux maintenance 80%: >50.000h (L80B20)

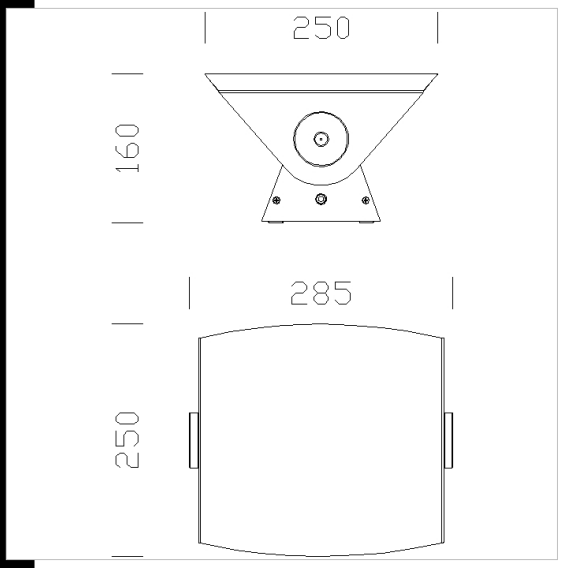

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22182011-00	CLD	1,00	LED-644lm-3000K-CRI 80	10 W	WHITE
22182071-00	CLD	1,50	LED-644lm-3000K-CRI 80	10 W	SILVER

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated