


Download

DXF 2D
- cover2.dxf
Montaggi
- COVERLIGHT 1-2-3-4 rev0.pdf



Cover light 2 - square

Housing: Extruded aluminium.
Reflector: Adjustable angle frosted opal polycarbonate diffuser
LED: Power factor $\geq 0,95$
Luminous flux maintenance 80%: $>50.000h$ (L80B20)

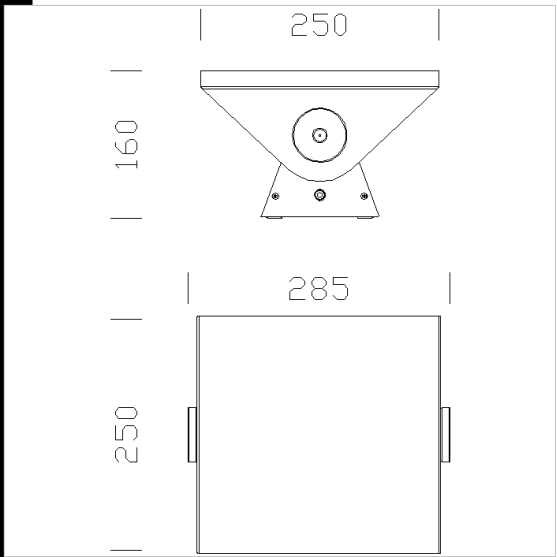

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22182111-00	CLD CELL	1.50	LED-644lm-3000K-CRI 80	7 W	WHITE
22182172-00	CLD	1.50	LED-644lm-3000K-CRI 80	10 W	SILVER

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated