



Download

DXF 2D
- cover3.dxf


Montaggi
- COVERLIGHT 1-2-3-4 rev0.pdf

BIM
- Cover light 3 LED - 20201005.zip



Cover light 3 LED

Housing: Extruded aluminium.
Reflector: Adjustable angle frosted opal polycarbonate diffuser
LED: Power factor $\geq 0,95$
Luminous flux maintenance 80%: >50.000h (L80B20)

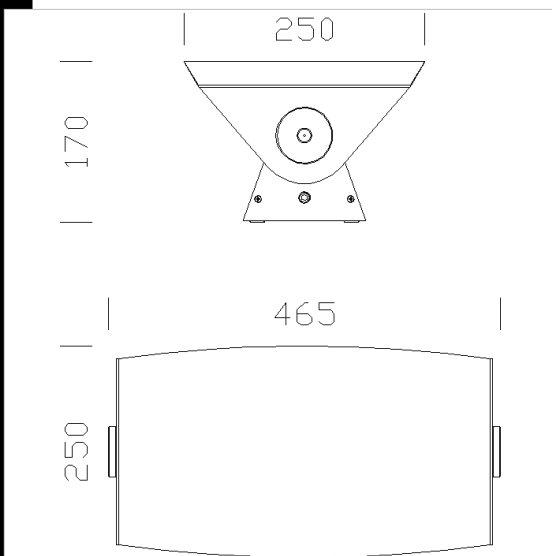

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22182273-00	CLD	1,53	LED-1134lm-3000K-CRI 80	15 W	SILVER

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated