

Cover light 4 - Design Paolo bistacchi



A series of fixtures for interior wall mounting with energy saving lamps. Their extremely rapid and easy installation together with their simple yet elegant design, make this series of products ideal for offices, lobbies and open-space areas. Their tasteful design and luminous efficiency create lighting effects full of atmosphere.

Housing: Extruded aluminium.

Reflector: Adjustable angle frosted opal polycarbonate diffuser

Lampholder: Polycarbonate with phosphorous bronze contacts


Electric gear: 230V/50Hz power supply with traditional or electronic ballast
Hard wire, cross section 0.50 sqmm, and high-temperature resistant (up to 90°C) PVC-HT sheath, in accordance with CEI 20-20 standards. 2P + T terminal block (maximum allowed lead cross section 2.5 sqmm.)

Equipment: Mounting plate separated from the electric gear tray by means of a knife switch for easy installation and maintenance.

Lamps: Complete with lamps: FLC 26D - 4000 K amalgam

Emergency version: In the event of a blackout, one lamp connected to the emergency circuit remains on, thus avoiding the inconvenience usually caused by sudden power failure. Its emergency run time is 60 minutes. When power supply is restored, the battery recharges automatically.

Design studio P&B associati

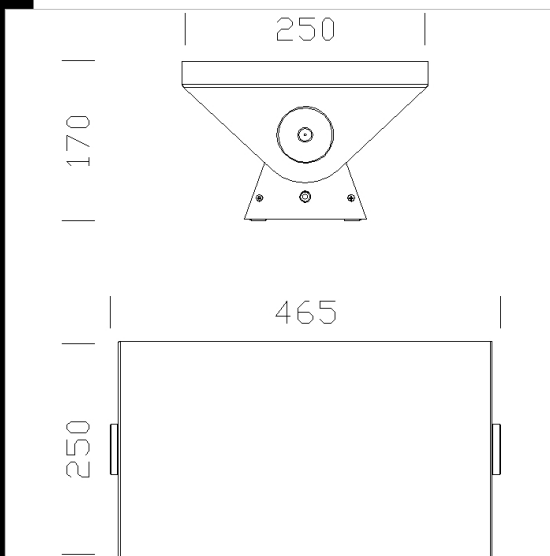

Code	Gear	Kg	Watt	Base	Lamps	Colour
22182275-09	CELL-E	2,10	FLC 2x26D	G24d-3	1800lm-4000K-Ra 1b	SILVER
22182275-07	CNRL-E	0,00	FLC 2x26D/E	G24q-3	1800lm-4000K-Ra 1b	MET. SILVER
22182275-00	CNR-L	2,60	FLC 2x26D	G24d-3	1800lm-4000K-Ra 1b	SILVER
22182275-08	CELL	1,50	FLC 2x26D/E	G24q-3	1800lm-4000K-Ra 1b	SILVER



Download

DXF 2D
- coverlight2x26quadro.dxf

Montaggi
- cover-schermo-orient.dxf
- 771820 cover-cover light.pdf
- coverlight-schermo-quadro-orient.dxf