



Slimcover Black - Design Paolo Bistacchi


A series of fixtures for interior wall mounting with T5 lamps. Their extremely rapid and easy installation together with their simple yet elegant design, make this series of products ideal for offices, lobbies and open-space areas. Their tasteful design and luminous efficiency create lighting effects full of atmosphere.

Housing: Extruded aluminium.

Lampholder: Polycarbonate with phosphorous bronze contacts

Electric gear: 230V/50Hz power supply with electronic ballast. Hard wire, cross section 0.50 sqmm, and high-temperature resistant (up to 90°C) PVC-HT sheath, in accordance with CEI 20-20 standards. 2P + T terminal block (maximum allowed lead cross section 2.5 sqmm.)

Lamps: Complete with high performance T5 lamps

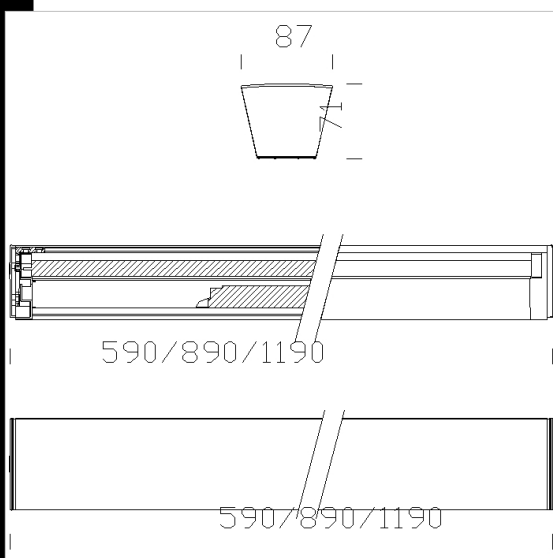

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
22182432-07	CELL-E	1.30	FL 1x28-2650lm-4000K-Ra 1b	28 W	G5	BLACK
22182433-12	CELL-D	2.20	FL 1x39-3100lm-4000K-Ra 1b	41 W	G5	BLACK
22182432-00	CELL	2.55	FL 1x28-2650lm-4000K-Ra 1b	28 W	G5	BLACK
22182431-12	CELL-D	2.00	FL 1x24-1750lm-4000K-Ra 1b	24 W	G5	BLACK
22182431-00	CELL	1.95	FL 1x24-1750lm-4000K-Ra 1b	24 W	G5	BLACK
22182433-00	CELL	2.00	FL 1x39-3100lm-4000K-Ra 1b	43 W	G5	BLACK
22182432-12	CELL-D	1.30	FL 1x28-2650lm-4000K-Ra 1b	30 W	G5	BLACK
22182434-12	CELL-D	2.60	FL 1x54-4450lm-4000K-Ra 1b	59 W	G5	BLACK
22182434-07	CELL-E	2.95	FL 1x54-4450lm-4000K-Ra 1b	58 W	G5	BLACK
22182430-12	CELL-D	2.00	FL 1x14-1250lm-4000K-Ra 1b	15 W	G5	BLACK
22182430-00	CELL	1.40	FL 1x14-1250lm-4000K-Ra 1b	16 W	G5	BLACK

Download

DXF 2D
- 182410.dxf

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated