

## Pannello luminoso - Smart sensor

The superior quality of LED lighting is now more accessible thanks to a benchmark product that offers, at reduced costs, the ideal light for offices, shopping malls, hotels and in general all those spaces that need constant lighting.

Pannello luminoso comes in either a square or rectangular shape that can be easily installed into ceilings. It is equipped with fast connectors, avoiding the need to open the unit. Its shape guarantees uniform light distribution, while the white-light LEDs generate high light quality, ensuring the best visual comfort and perfect colour rendering.

Inner slab: in PMMA. Diffuser: extruded in opal engineering plastic with high thermal transmittance. Wiring: rapid wiring connection, the fixture does not need to be opened. Designed with plug-socket connection for both the power supply and the 1-10V dimmer

Instant start with no shimmer and absolutely silent operation.

Energy saving of over 50% compared to traditional lights to fluorescent tubes.


No RF interference and electromagnetic emissions.

No risk to the environment due to the absence of materials containing mercury or lead.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards. Installable on normally inflammable.

Smart sensor integrated. Remote control to purchase separately.

LED: Luminous flux maintenance L70B50: 50.000h. Power factor >0.9

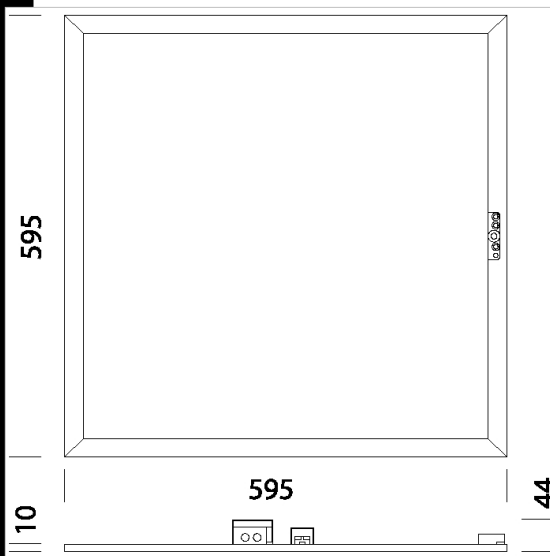

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22184510-00	CLD CELL-D	3.78	LED-3200lm-4000k-CRI>80	32 W	BIANCO

### Accessories



- Smart sensor remote

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated