




Download

DXF 2D
- panitecha.dxf

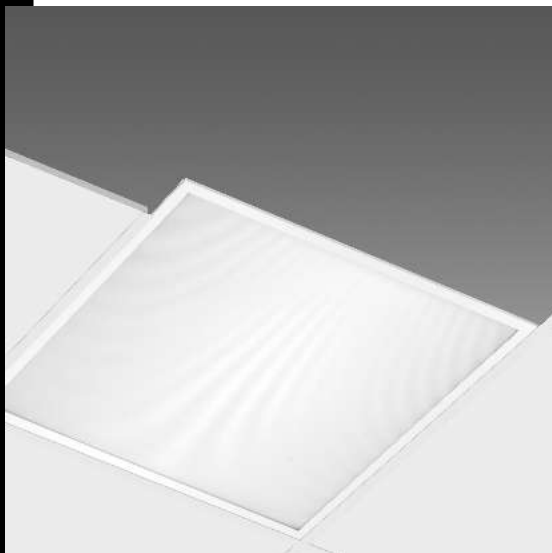

PanelTech UGR<19 - A - DIP SWITCH

Wiring: quick wiring connection, no need to open the fixture. Standard version with plug-socket connection for both power and 0-10V dimming. Light beam focused on the work place. Excellent unified glare rating (UGR<19) in any situation.

Instant on-off without flicker and audible noise.

Energy costs are cut down by 50% compared to conventional lamps and fluorescent tubes.

No electromagnetic emissions and radio-frequency interference (RFI).

No risk to the environment due to the presence of materials without mercury or lead content.

Standards: products comply with EN60598-1 CEI 34-21, with IP40IK05 protection degree according to EN 60529. Suitable for installation on normally inflammable surfaces.

Internal slab: in PMMA.


Diffuser: extruded in prismatic engineering plastic with high thermal transmittance.

Photobiological risk classification: exempt group.

LED lamp life over 50000 hours. L80B20

Power factor: 0.95

Code	Wattage (W)	Beam Angle (°)	Lumen Output (lm)	CRI	Color
22184802-00 DIP SWITCH	700	23	4000K	-	WHITE
2460lm - CRI 80	750	25	4000K	2614lm - CRI 80	800
2770lm - CRI 80	850	28	4000K	2926lm - CRI 80	900
3075lm - CRI 80	950	31	4000K	3224lm - CRI 80	1000
3375lm - CRI 80					

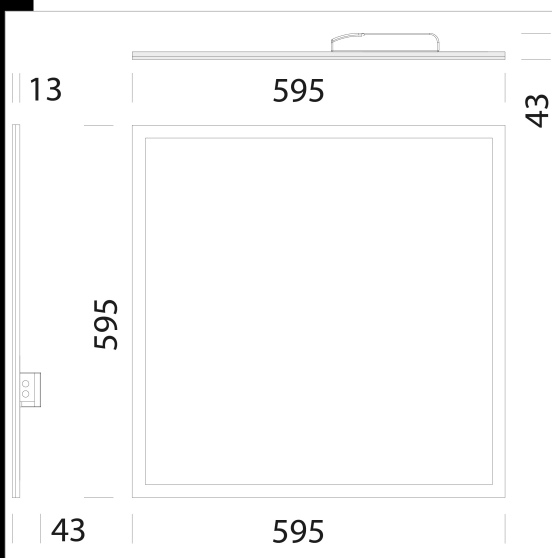

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22184802-00	CLD CELL	2,50	LED-3527lm-4000K-1050mA-CRI 80	34 W	WHITE

Accessori



- Frame 600x600

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated