

PanelTech - PUSH DALI - UGR<19

Frame: in aluminium. Inner slab: in PMMA. Diffuser: extruded in prismatic engineering plastic with high thermal transmittance. Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards. Installable on normally inflammable.

Power factor: 0.95


Luminous flux maintenance 80% 50000h (L80B20)

Photobiological safety class: exempt group

Download

DXF 2D
- pantecha.dxf

BIM
- PanelTech PUSH DALI - UGR19 - 20200224.zip

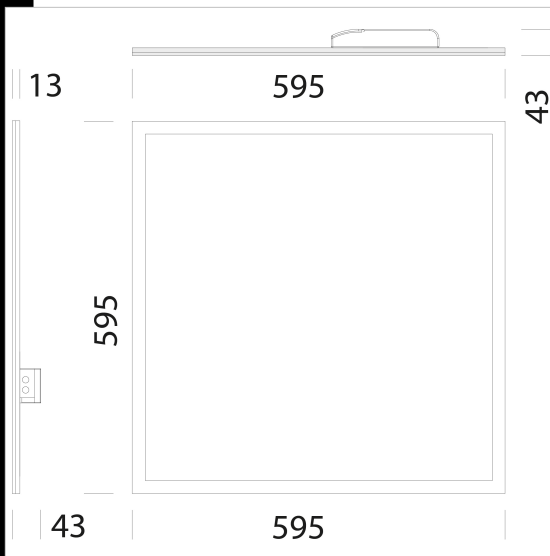

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22184810-1245	CLD-D-D	4,01	LED-3527lm-4000K-CRI 80	34 W	WHITE
22184811-1245	CLD-D-D	4,05	LED-3353lm-3000K-CRI 80	34 W	WHITE
22184810-0945	CLD CELL-E	4,30	LED-3527lm-4000K-CRI 80	35 W	WHITE
22184811-0945	CLD CELL-E	4,30	LED-3353lm-3000K-CRI 80	35 W	WHITE
22184810-3145	CLD CELL-D-D-E	3,22	LED-3527lm-4000K-CRI 80	35 W	WHITE
22184811-3145	CLD CELL-E	4,60	LED-3353lm-3000K-CRI 80	35 W	WHITE

Accessori



- Recessed springs



- Frame 600x600



- Frame - 600x600



- Frame - 600x600

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated