

**PanelTech High Performance UGR<19 - A**

The superior quality of LED lighting is now more accessible thanks to a benchmark product that offers, at reduced costs, the ideal light for offices, shopping malls, hotels and in general all those spaces that need constant lighting.

Wiring: rapid wiring connection, the fixture does not need to be opened. Instant start with no shimmer and absolutely silent operation.

Energy saving of over 50% compared to traditional lights to fluorescent tubes. Efficiency of the LEDs (95%), overheating protection, current control and ability to work with stabilized voltages.

Special circuit design which makes independent operation of each of the LEDs so as not to impair the operation of the other.

No RF interference and electromagnetic emissions.

No risk to the environment due to the absence of materials containing mercury or lead.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards. Installable on normally inflammable.

LED: 3000lm - 4000K - CRI93 - 25W

LED: 3650lm - 4000K - CRI93 - 33W

Power factor: 0.95

Luminous flux maintenance 70% 50000h (L70B50)

Photobiological safety class: exempt group


Quick connection with plug and socket, no need to open the fixture

Mounting on false ceiling beams

No maintenance

**Download**

DXF 2D  
- 22184810.dxf

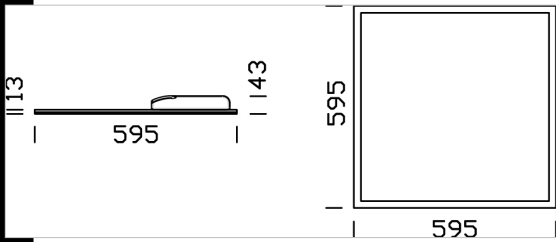

Code	Gear	Kg	Watt	Base	Lamps	Colour
22184813-00	CLD CELL	4,00	LED white 25W		3000lm-4000K-CRI 93	WHITE
22184817-00	CLD CELL	4,00	LED white 33W		3650lm-4000K-CRI 93	WHITE
22184813-1241	CLD CELL-D-D	4,06	LED white 25W		3000lm-4000K-CRI 93	WHITE
22184817-1241	CLD CELL-D-D	6,37	LED white 33W		3650lm-4000K-CRI 93	WHITE

**Accessories**



- Powered suspension O



- Ceiling suspension



- Ceiling suspension



- Ceiling suspension O



- Powered suspension 3-5 p