



## Download

DXF 2D  
- pantecha.dxf

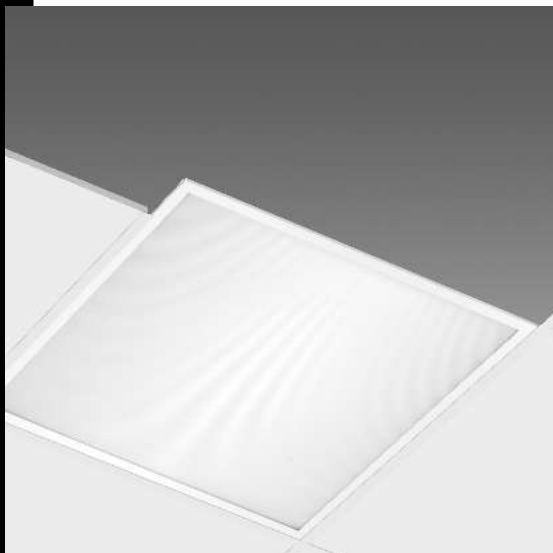

## Pannello - UGR<19 - HE

Aluminum frame. Diffuser: in highly efficient material, polymethylmethacrylate, a polymer that maintains its characteristics unaltered and avoids the tendency to yellowing. Wiring: fast, no need to open the fixture; equipped with quick connector. LED: high efficiency light sources. Applications: ideal for office and supermarket lighting. UGR <19: expected value according to EN 12464-1 LED lamp life over 50000 hours. L80B20

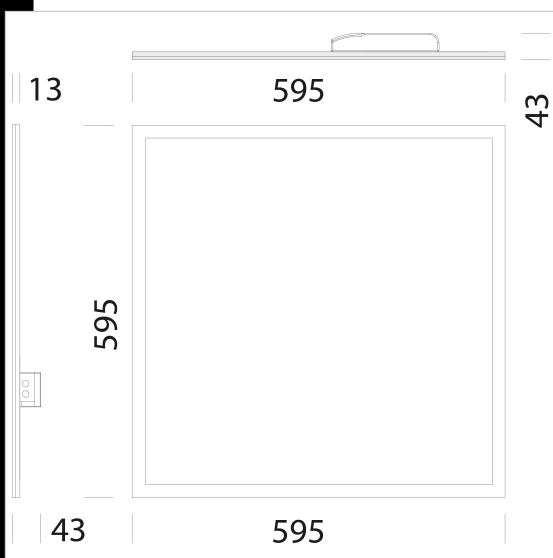

| Code        | Gear     | Kg   | Lumen Output-K-CRI      | WTot | Colour |
|-------------|----------|------|-------------------------|------|--------|
| 22184819-00 | CLD CELL | 4,11 | LED-4350lm-4000K-CRI 80 | 31 W | WHITE  |

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated