


**PanelTech High Performance A - UGR<19 - Ceiling**

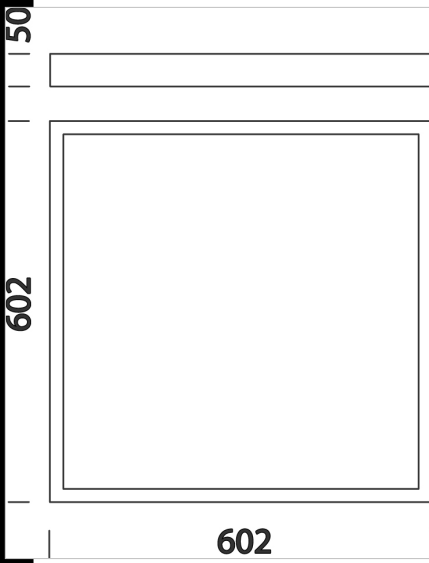

The superior quality of LED lighting is now more accessible thanks to a benchmark product that offers, at reduced costs, the ideal light for offices, shopping malls, hotels and in general all those spaces that need constant lighting.

Wiring: rapid wiring connection, the fixture does not need to be opened. Designed with plug-socket connection for both the power supply and the 0-10V dimmer

Instant start with no shimmer and absolutely silent operation.

Energy saving of over 50% compared to traditional lights to fluorescent tubes.

Efficiency of the LEDs (95%), overheating protection, current control and ability to work with stabilized voltages.

Special circuit design which makes independent operation of each of the LEDs so as not to impair the operation of the other.

No RF interference and electromagnetic emissions.

No risk to the environment due to the absence of materials containing mercury or lead.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards. Installable on normally inflammable.

LED: 3000lm - 4000K - CRI93 - 25W  
LED: 3650lm - 4000K - CRI93 - 33W

Power factor: 0.95  
Luminous flux maintenance 70% 50000h (L70B50)  
Photobiological safety class: exempt group  
Standard version: 0-10V dimmer, dimmable from 0% to 100%  
Quick connection with plug and socket, no need to open the fixture  
Mounting on false ceiling beams  
No maintenance

IK05 DIMM CLD CELL  
 DIG  
 CE IP40  
 EL UV  
 A+B=  
 Colour quality CLD CELLD -DIG  
 RGO

Download  
DXF 2D  
- 185510.dxf  
Montaggi  
- Pannello - installation space.pdf

Code	Gear	Kg	Watt	Base	Lamps	Colour
22185513-00	CLD CELL	6,35	LED white 25W		3000lm-4000K-CRI 93	WHITE
22185517-00	CLD CELL	6,35	LED white 33W		3650lm-4000K-CRI 93	WHITE
22185513-1241	CLD CELLDD	6,35	LED white 25W		3000lm-4000K-CRI 93	WHITE
22185517-1241	CLD CELLDD	6,35	LED white 33W		3650lm-4000K-CRI 93	WHITE