



Download

DXF 2D
- 185511.dxf

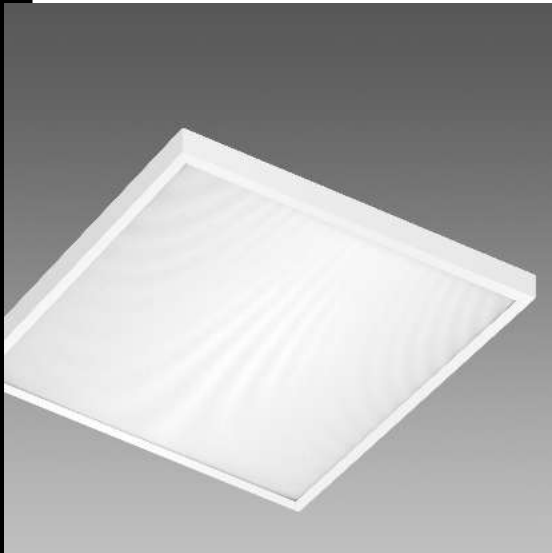

Pannello - UGR<19 - HE - ceiling

Aluminum frame. Diffuser: in highly efficient material, polymethylmethacrylate, a polymer that maintains its characteristics unaltered and avoids the tendency to yellowing. Wiring: fast, no need to open the fixture: equipped with quick connector. LED: high efficiency light sources. Applications: ideal for office and supermarket lighting. UGR <19: expected value according to EN 12464-1 LED lamp life over 50000 hours. L80B20

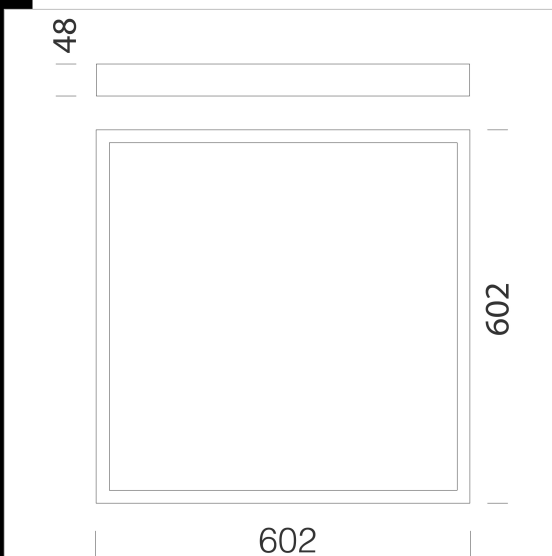

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22185514-00	CLD CELL	4,11	LED-4350lm-4000K-CRI 80	31 W	WHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated