

PanelTech R2 - UGR<19 - CEILING



The superior quality of LED lighting is now more accessible thanks to a benchmark product that offers, at reduced costs, the ideal light for offices, shopping malls, hotels and in general all those spaces that need constant lighting.

Wiring: rapid wiring connection, the fixture does not need to be opened. Designed with plug-socket connection for both the power supply and the 0-10V dimmer

Instant start with no shimmer and absolutely silent operation.

Energy saving of over 50% compared to traditional lights to fluorescent tubes. Efficiency of the LEDs (95%), overheating protection, current control and ability to work with stabilized voltages.

Special circuit design which makes independent operation of each of the LEDs so as not to impair the operation of the other.

No RF interference and electromagnetic emissions.

No risk to the environment due to the absence of materials containing mercury or lead.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards. Installable on normally inflammable.

LED: 2950lm - 3000K - CRI93 - 29W

LED: 3050lm - 4000K - CRI93 - 29W

Power factor: 0.95

Luminous flux maintenance 70% 50000h (L70B50)


Photobiological safety class: exempt group

Standard version: 0-10V dimmer, dimmable from 0% to 100%

Quick connection with plug and socket, no need to open the fixture

Mounting on false ceiling beams

No maintenance

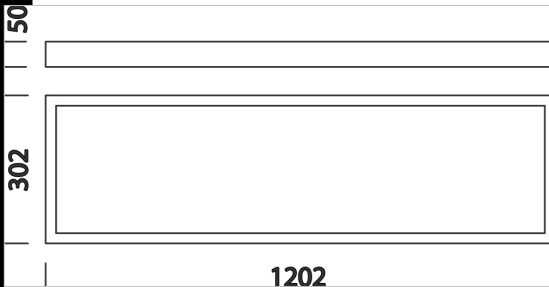

Code	Gear	Kg	Watt	Base	Lamps	Colour
22185710-00	CLD CELL	8,67	LED white 29W		3050lm-4000K-CRI 93	WHITE
22185711-00	CLD CELL	8,66	LED white 29W		2950lm-3000K-CRI 93	WHITE
22185710-12	CLD CELL-D	6,48	LED white 29W		3050lm-4000K-CRI 93	WHITE
22185711-12	CLD CELL-D	7,64	LED white 29W		2950lm-3000K-CRI 93	WHITE
22185710-1241	CLD CELL-D-D	8,67	LED white 29W		3050lm-4000K-CRI 93	WHITE
22185711-1241	CLD CELL-D-D	8,66	LED white 29W		2950lm-3000K-CRI 93	WHITE
22185715-1241	CLD CELL-D-D	4,00	LED white 50W		5300lm-4000K-CRI 93	WHITE

- IK05
- DIMM DIG
- CLD CELL
- Recycling
- IP40
- CE
- EL
- UV
- A+B=
- CLD CELLD-DIG
- UGR<19
- LOW FLICKER
- Colour quality
- CLD CELLD-DIG
- RG0

Download
DXF 2D
- 185710.dxf