


## Nizza 3 - for shooks

Frame: in steel sheet. Housing: in aluminium. Diffuser: in opal engineering plastic with high transmittance. Wiring: rapid wiring connection, the fixture does not need to be opened; equipped with fast connector. Installation: suited for installation into false ceilings with round-edge staves and 100 mm pitch. LED: high-efficiency light sources. Low Flicker: product with a very low flicker; uniform light for greater eye protection. LED: luminous flux maintenance 80%: 50.000h (L80B20). Power factor 0.95

### Download

DXF 2D  
- niz3.dxf

Montaggi  
- NIZZA 2-3 rev3.pdf  
- nizza shooks compatibility.pdf

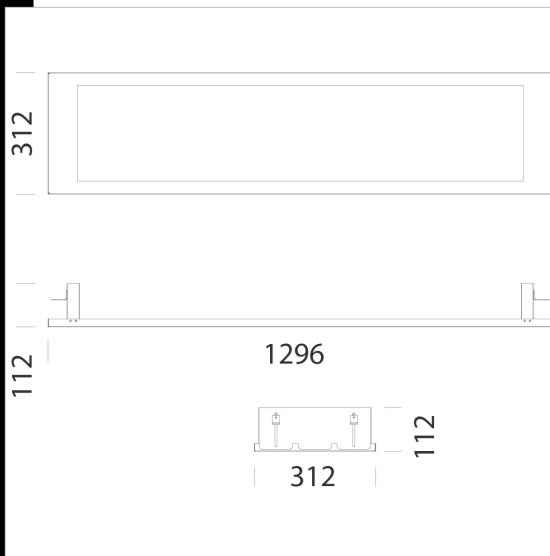

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22185810-00	CLD	3,94	LED-3675lm-4000K-CRI 83	34 W	WHITE
22185810-12	CLD-D	5,82	LED-3675lm-4000K-CRI 83	34 W	WHITE
22185810-1241	CLD-D-D	5,82	LED-3675lm-4000K-CRI 83	33 W	WHITE
22185811-00	CLD	4,12	LED-3417lm-3000K-CRI 83	34 W	WHITE
22185811-12	CLD-D	5,82	LED-3417lm-3000K-CRI 83	34 W	WHITE
22185811-1241	CLD-D-D	5,82	LED-3417lm-3000K-CRI 83	33 W	WHITE

### Accessori



- EM Kit R

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated