

Download

DXF 2D
- store1slm.dxf

Montaggi
- STORE LED COB rev7.pdf



Store 1 - CRI 93

A new series of the popular and top-quality STORE LED adjustable recessed spotlights.

Upgrade your lighting system with innovative technological solutions!

Housing: Sheet steel

Reflector: in die-cast polished aluminium, high efficiency and anti-glare.

Coating: Fluid-coated with a humidity resistant, UV-stabilised acrylic-resin paint, interior part is black and the border is white.

Equipment: Supplied with springs ensuring perfect adherence to 1 to 25 mm thick false ceilings.

Terminal block: maximum allowed lead cross section 1,5mm²


Regulations: Manufactured in accordance with EN 60598-1-CEI 34-21 standards. Degree of protection in accordance with EN60529 standard.

Power factor: 0.95

Luminous flux maintenance 80%: 50000h (L80B20).

Photobiological safety class: exempt group EN62471.

Lower lamp wattages means greater economy, more than 80% saving

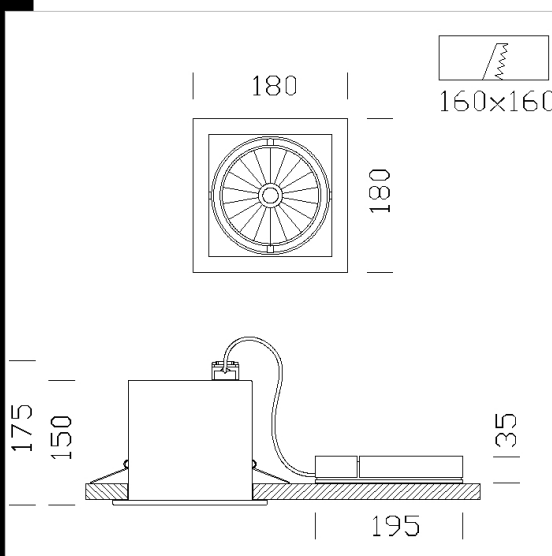

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22186210-00	CLD	1,30	LED COB-2219lm-3000K-CRI 93	18 W	WHITE
22186210-68	CLD	1,30	LED COB-2374lm-4000K-CRI 93	19 W	WHITE
22186310-00	CLD	1,35	LED COB-3027lm-3000K-CRI 93	26 W	WHITE
22186310-68	CLD	1,42	LED COB-3239lm-4000K-CRI 93	26 W	WHITE
22186613-00	CLD	1,50	LED COB-3915lm-3000K-CRI 93	39 W	WHITE
22186614-00	CLD	1,40	LED COB-4211lm-4000K-CRI 93	39 W	WHITE
22186210-1241	CLD-D-D	1,35	LED COB-2219lm-3000K-CRI 93	18 W	WHITE
22186210-6841	CLD-D-D	1,35	LED COB-2374lm-4000K-CRI 93	19 W	WHITE
22186310-1241	CLD CELL-D-D	1,48	LED COB-3027lm-3000K-CRI 93	26 W	WHITE
22186310-6841	CLD-D-D	1,38	LED COB-3239lm-4000K-CRI 93	26 W	WHITE
22186613-1241	CLD CELL-D-D	1,40	LED COB-3915lm-3000K-CRI 93	40 W	WHITE
22186614-1241	CLD CELL-D-D	1,40	LED COB-4211lm-4000K-CRI 93	40 W	WHITE
22186210-09	CLD CELL-E	1,80	LED COB-2219lm-3000K-CRI 93	19 W	WHITE
22186210-6809	CLD CELL-E	1,80	LED COB-2374lm-4000K-CRI 93	19 W	WHITE
22186310-09	CLD CELL-E	1,70	LED COB-3027lm-3000K-CRI 93	26 W	WHITE
22186310-6809	CLD CELL-E	1,80	LED COB-3239lm-4000K-CRI 93	27 W	WHITE
22186613-09	CLD CELL-E	1,80	LED COB-3915lm-3000K-CRI 93	40 W	WHITE
22186614-09	CLD CELL-E	1,95	LED COB-4211lm-4000K-CRI 93	39 W	WHITE
22186210-31	CLD CELL-E	1,80	LED COB-2219lm-3000K-CRI 93	19 W	WHITE
22186210-3113	CLD CELL-E	1,80	LED COB-2374lm-4000K-CRI 93	19 W	WHITE
22186310-31	CLD CELL-E	1,80	LED COB-3027lm-3000K-CRI 93	27 W	WHITE
22186310-3113	CLD CELL-E	1,80	LED COB-3239lm-4000K-CRI 93	27 W	WHITE
22186613-31	CLD CELL-E	1,80	LED COB-3915lm-3000K-CRI 93	40 W	WHITE
22186614-31	CLD CELL-E	1,80	LED COB-4211lm-4000K-CRI 93	40 W	WHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated