

## Spot Box 2 - CRI 92

Disano is proud to introduce a brand new range of LED spotlights, with its compact dimensions, Minisquare fixtures are best for installation in small spaces, such as false ceilings, furnishings and window panels. Its LED sources allow remarkable energy savings and a really excellent light output.

Frame: made of aluminium, complete with fixed downlight.

Housing: made of die-cast aluminium.

Reflector: high-efficiency metallized polycarbonate.


LED: Luminous flux maintenance 80%: 50.000h (L80B20).

Power factor >0.9


Photobiological safety class: exempt group EN62471.

High light output (CRI 92) is guaranteed by specific anti-glare optics UGR>19

On request: possibility to switch lights ON/OFF independently.

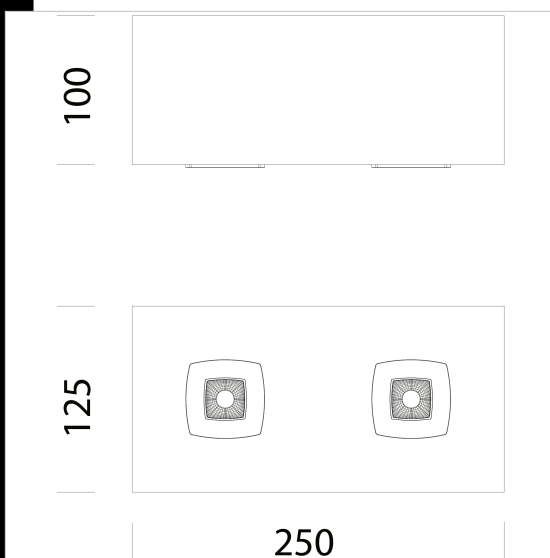

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22189010-00	CLD CELL-DI	1,70	LED-984lm-4000K-48°-CRI 92	20 W	BIANCO
22189011-00	CLD CELL-DI	1,68	LED-900lm-3000K-48°-CRI 92	22 W	BIANCO

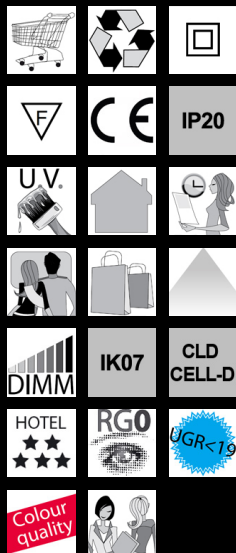

### Download

DXF 2D  
- spotb2.dxf

Montaggi  
- SPOTBOX.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated