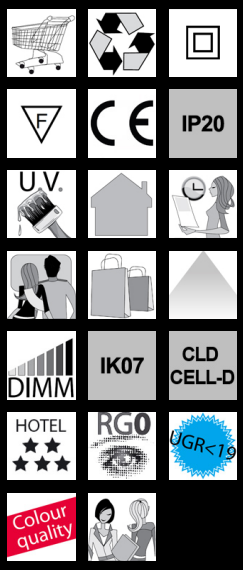

Spot Box 3 Comfort - CRI 92

Frame: made of aluminium, complete with fixed donwlight. Housing: made of die-cast aluminium.
Reflector: polycarbonate. LED: Luminous flux maintenance 80%: 50.000h (L80B20).
Power factor >0.9
Photobiological safety class: exempt group EN62471.
High light output (CRI 92) is guaranteed by specific anti-glare optics UGR>19
On request: possibility to switch lights ON/OFF independently.

Download

DXF 2D
- spotbc3.dxf

Montaggi
- SPOTBOX.pdf

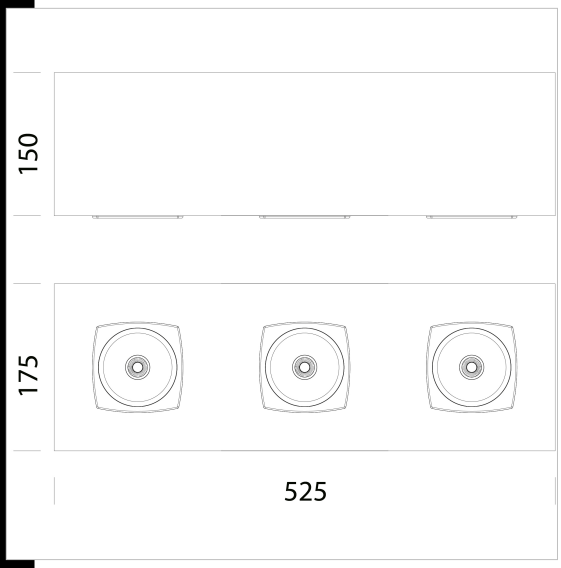

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22189112-00	CLD CELL-DI	3,78	LED3x-920lm-4000K-38°-CRI 92	33 W	BIANCO
22189113-00	CLD CELL-DI	2,35	LED3x-900lm-3000K-38°-CRI 92	33 W	BIANCO

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated