


Download
DXF 2D
- sbm2.dxf



Spot Box Marte 2

Frame: made of aluminium, complete with adjustable donwlight. Lens: in PMMA with high efficiency output and very low glare rate. LED: Luminous flux maintenance 80%: 50.000h (L80B20). Power factor >0.9. On request: possibility to switch lights ON/OFF independently.

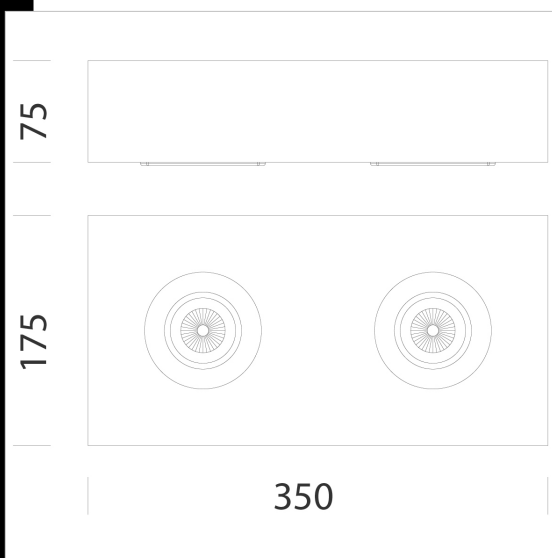

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22189210-00	CLD	2,13	LED2x-724lm-4000K-40°-CRI 93	18 W	WHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated