



## Spot Box Marte 3

Frame: made of aluminium, complete with adjustable downlight. Lens: in PMMA with high efficiency output and very low glare rate. LED: Luminous flux maintenance 80%: 50.000h (L80B20). Power factor >0.9. On request: possibility to switch lights ON/OFF independently.

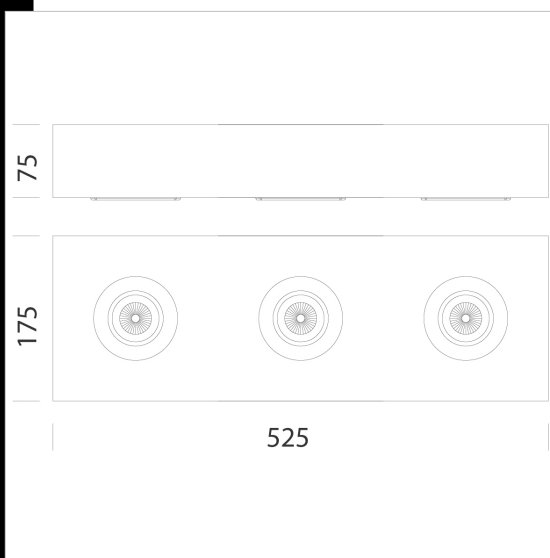

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22189212-00	CLD	2,84	LED3x-724lm-4000K-40°-CRI 93	30 W	WHITE

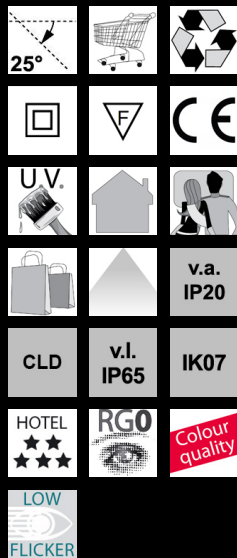

Download  
DXF 2D  
- sbm3.dxf

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated