



Matrix A2 LED111 - Base version

Housing: In die-cast aluminium with central shaft to carry cables.
 Coating: with a UV-stabilised powder acrylic-resin paint
 Equipment: Supplied with an aiming bar .
 Regulations: Manufactured in accordance with EN 60598-1-CEI 34.21 standards. Degree of protection in accordance with EN60529 standards.
 LED 11W - 3000K - 1340lm - 40° - CRI>80 - DIM
 Luminous flux maintenance L70B50: 50.000h.
 Power factor >0.9
 Photobiological safety class: exempt group EN62471.

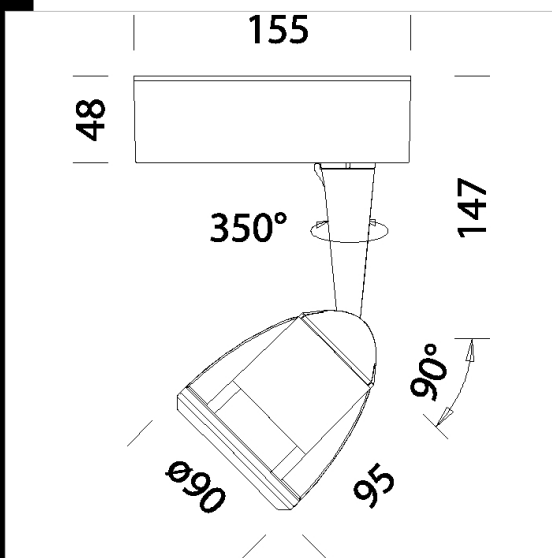

Code	Gear	Kg	Watt	Base	Lamps	Colour
22200172-00	CLD CELL-D	0,90	LED white 11W		1340lm-3000K - 40°-CRI>80	SILVER

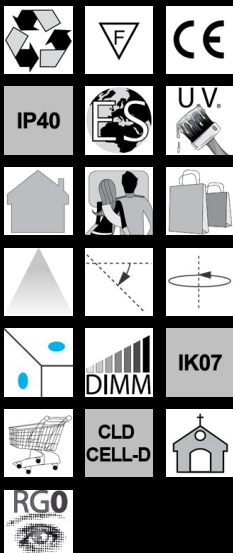

Download
 DXF 2D
 - 200172.dxf