


## Matrix A2 MASTERLED 7-10W

Housing: In die-cast aluminium with central shaft to carry cables.  
 Coating: with a UV-stabilised powder acrylic-resin paint  
 Lampholder: Ceramic with silver-plated contacts  
 Equipment: Supplied with an aiming bar .  
 Regulations: Manufactured in accordance with EN 60598-1-CEI 34.21 standards. Degree of protection in accordance with EN60529 standards  
 MASTERLED: particularly suited for public spaces such as reception halls, entrance lobbies, corridors, stairways and bathrooms where lights stay on all day, 40,000 hours of lifespan, and 80% energy saving compared to ALO 35W.

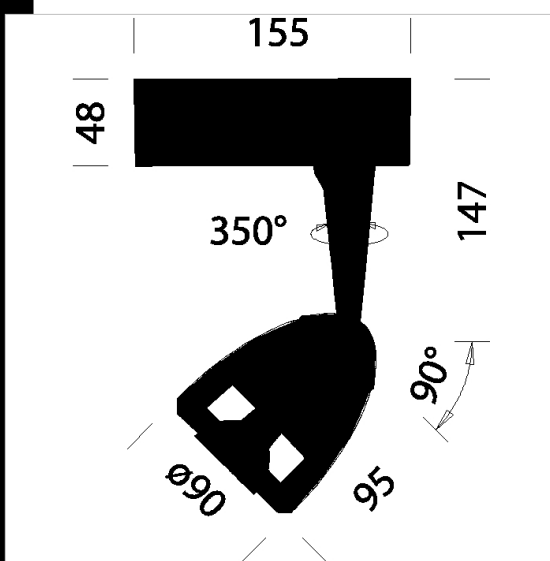

Code	Gear	Kg	Watt	Base	Lamps	Colour
22200174-00	CLD CELL-D	0,85	MASTERLED 10W	GU5.3	650lm-3000K-24°	SILVER
22200175-00	CLD CELL	0,90	MASTERLED 7W	GU5.3	410lm-3000K - 25°-CRI 80	SILVER


### Accessories



- Anti-dazzle shutter and



- Conveyor mm.82

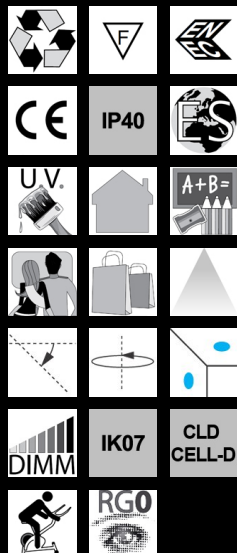

Download  
 DXF 2D  
 - 200175.dxf