




Download
DXF 2D
- matrix_3.dxf



Matrix with suspension

Housing: In die-cast aluminium with central shaft to carry cables.
 Diffuser: Tempered glass .
 Coating: with a UV-stabilised powder acrylic-resin paint
 Lampholder: Ceramic with silver-plated contacts
 Electric gear: 230 V/50 Hz power supply with electronic ballast or 12V transformer. Silicone wire with fibreglass braid, cross-section 1.0 sqmm.
 Equipment: Supplied with an aiming bar .
 Regulations: Manufactured in accordance with EN 60598-1-CEI 34.21 standards. Degree of protection in accordance with EN60529 standards.

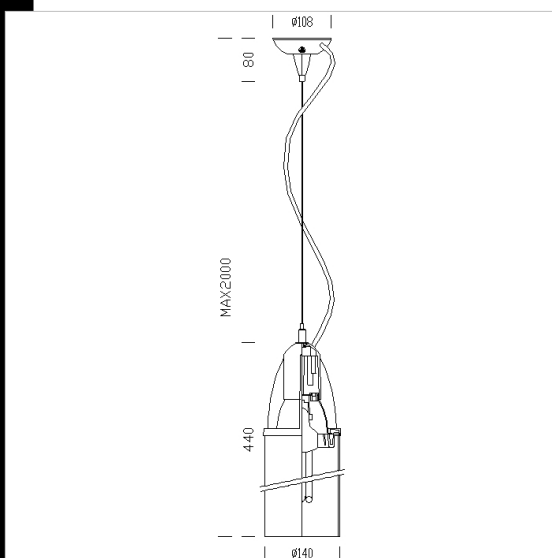

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
22201374-00	S	1.95	PAR30/FLC23-1500lm-4000K-Ra 1b	0 W	E27	SILVER

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated