


## Sonik Q3 LED 7W - 220-240V - Base version

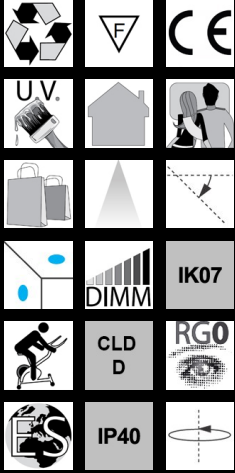

Housing: in die cast aluminium with central shaft to allow wires to pass through  
 Painting: dust painted using acrylic resin based paint stabilised against UV rays

Lampholder: ceramic type with silver-plated contacts or phosphor bronze contacts

Equipment: supplied complete with small directional alignment bar

Standards: Manufactured in compliance with EN 60598-1-CEI 34.21 standards, with a degree of protection complying with EN 60529 standards.


LED 6,5W - Gu10 - 600lm - 3000k - 38° - CRI 80

Luminous flux maintenance 70% 25000h (L70B50)

Photobiological safety class: exempt group EN62471.

### Download

DXF 2D  
 - sonik\_bas.dxf

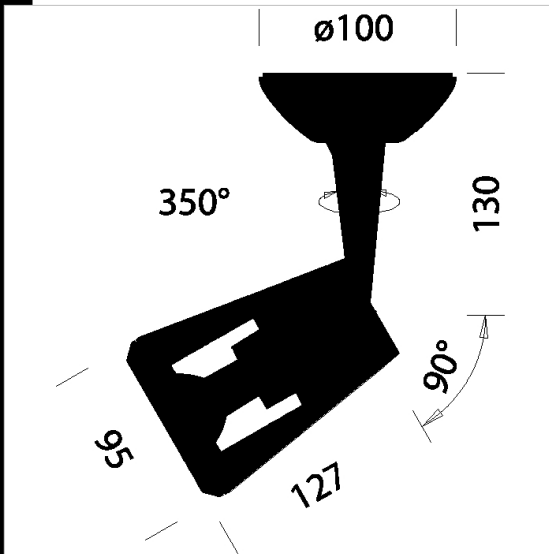

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Base	Colour
22201477-00	CLD CELL-D	0.70	LED COB-500lm-3000K-38°-CRI 80	6 W	GU10	SILVER
22201417-00	CLD CELL-D	0.70	LED COB-500lm-3000K-38°-CRI 80	6 W	GU10	WHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated