


### Download

DXF 2D  
- g9d.dxf

Montaggi  
- MATRIX Q9 REV2.pdf

BIM  
- Matrix Q9 Dark "D" - base -  
20201005.zip

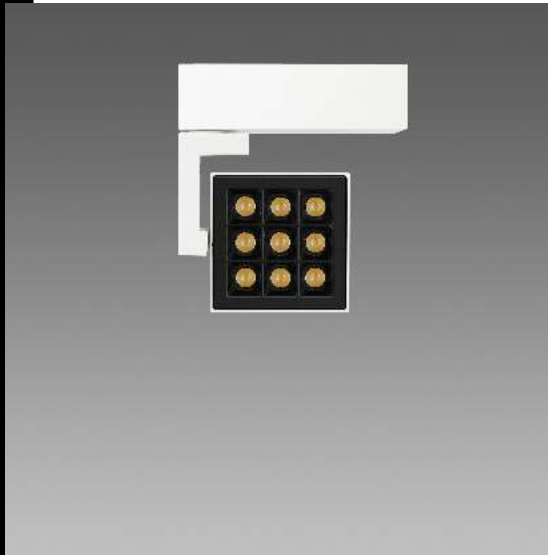


## Matrix Q9 Dark "D" - base

This version features a particular shape and a design with clean lines that can meet different architectonic lighting needs using high colour rendering LEDs. It is an all-new spotlight, which is entirely adjustable for an extraordinarily effective lighting project that adds value to any space and object. Housing: in die-cast aluminium. Optic compartment: front in black polycarbonate (the white colour version is available upon request). Lens: in PMMA with high efficiency output and very low glare rate. Regulations: Manufactured in accordance with EN 60598-1-CEI 34.21 standards. Degree of protection in accordance with EN60529 standards. LED: High-efficiency light sources (CRI 90).

Luminous flux maintenance L80B20: 50.000h.

Power factor >0.95

Photobiological safety class: Exempt group

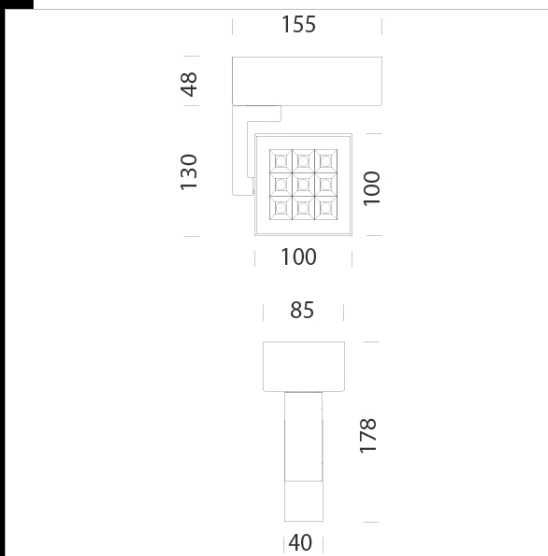

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22203010-00	CLD	0,97	LED-2403lm-3000K-32°-CRI>90	32 W	WHITE
22203030-00	CLD	1,30	LED-2403lm-3000K-32°-CRI>90	32 W	BLACK
22203011-00	CLD	0,97	LED-2584lm-4000K-32°-CRI>90	32 W	WHITE
22203031-00	CLD	0,97	LED-2584lm-4000K-32°-CRI>90	32 W	BLACK
22203012-00	CLD	1,00	LED-2471lm-3000K-38°-CRI>90	32 W	WHITE
22203032-00	CLD	0,97	LED-2471lm-3000K-38°-CRI>90	32 W	BLACK
22203013-00	CLD	1,30	LED-2657lm-4000K-38°-CRI>90	32 W	WHITE
22203033-00	CLD	0,97	LED-2657lm-4000K-38°-CRI>90	32 W	BLACK
22203014-00	CLD	1,07	LED-2486lm-3000K-50°-CRI>90	32 W	WHITE
22203034-00	CLD	0,97	LED-2486lm-3000K-50°-CRI>90	32 W	BLACK
22203015-00	CLD	0,98	LED-2674lm-4000K-50°-CRI>90	32 W	WHITE
22203035-00	CLD	1,30	LED-2674lm-4000K-50°-CRI>90	32 W	BLACK
22203010-1241	CLD-D-D	1,30	LED-2403lm-3000K-32°-CRI>90	32 W	WHITE
22203030-1241	CLD-D-D	1,30	LED-2403lm-3000K-32°-CRI>90	32 W	BLACK
22203011-1241	CLD-D-D	1,30	LED-2584lm-4000K-32°-CRI>90	32 W	WHITE
22203031-1241	CLD-D-D	1,30	LED-2584lm-4000K-32°-CRI>90	32 W	BLACK
22203012-1241	CLD-D-D	1,06	LED-2471lm-3000K-38°-CRI>90	32 W	WHITE
22203032-1241	CLD-D-D	1,30	LED-2471lm-3000K-38°-CRI>90	32 W	BLACK
22203013-1241	CLD-D-D	1,30	LED-2657lm-4000K-38°-CRI>90	32 W	WHITE
22203033-1241	CLD-D-D	0,97	LED-2657lm-4000K-38°-CRI>90	32 W	BLACK
22203014-1241	CLD-D-D	0,97	LED-2486lm-3000K-50°-CRI>90	32 W	WHITE
22203034-1241	CLD-D-D	1,06	LED-2486lm-3000K-50°-CRI>90	32 W	BLACK
22203015-1241	CLD-D-D	1,07	LED-2674lm-4000K-50°-CRI>90	32 W	WHITE
22203035-1241	CLD-D-D	0,97	LED-2674lm-4000K-50°-CRI>90	32 W	BLACK

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated