

Focus with lens

This version features a particular shape and a design with clean lines that can meet different architectonic lighting needs using high colour rendering LEDs. It is an all-new spotlight, which is entirely adjustable for an extraordinarily effective lighting project that adds value to any space and object

Housing: in die-cast aluminium with anodised heat sink.

Version with lens: in PMMA with high efficiency output and very low glare rate

Coating: UV-resistant acrylic resin powder coating.


Standard: manufactured pursuant to EN 60598-1-CEI 34.21 and with a degree of protection pursuant to EN 60529.

on request: 38° - 60°

Luminous flux maintenance 50.000h (L80B20).

Power factor >0.95

Photobiological safety class: exempt group EN62471.

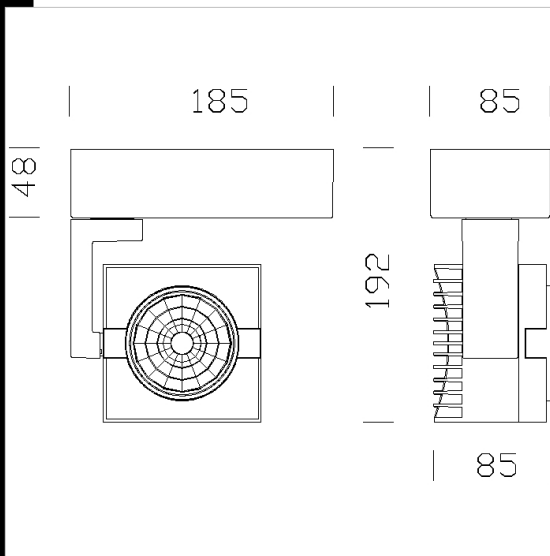

Download

DXF 2D
- mafocusbas.dxf

Montaggi
- Focus rev5.pdf

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22203510-00	CLD CELL-D	1.60	LED COB-2490lm-3000K-20°-CRI 92	26 W	WHITE
22203530-00	CLD CELL-D	1.59	LED COB-2490lm-3000K-20°-CRI 92	26 W	BLACK
22203570-00	CLD CELL-D	1.59	LED COB-2490lm-3000K-20°-CRI 92	26 W	SILVER
22203512-00	CLD CELL-D	1.59	LED COB-3628lm-3000K-20°-CRI 92	39 W	WHITE
22203532-00	CLD CELL-D	1.59	LED COB-3628lm-3000K-20°-CRI 92	39 W	BLACK
22203572-00	CLD CELL-D	1.59	LED COB-3628lm-3000K-20°-CRI 92	39 W	SILVER
22203514-00	CLD CELL-D	1.60	LED COB-4326lm-3000K-38°-CRI 92	45 W	WHITE
22203534-00	CLD CELL-D	1.62	LED COB-4326lm-3000K-38°-CRI 92	45 W	BLACK
22203574-00	CLD CELL-D	1.59	LED COB-4326lm-3000K-38°-CRI 92	45 W	SILVER
22203516-00	CLD CELL-D	1.60	LED COB-4815lm-3000K-60°-CRI 92	53 W	WHITE
22203536-00	CLD CELL-D	1.61	LED COB-4815lm-3000K-60°-CRI 92	53 W	BLACK
22203576-00	CLD CELL-D	1.60	LED COB-4815lm-3000K-60°-CRI 92	53 W	SILVER
22203510-1241	CLD CELL-D-D	1.51	LED COB-2490lm-3000K-20°-CRI 92	26 W	WHITE
22203530-1241	CLD CELL-D-D	1.59	LED COB-2490lm-3000K-20°-CRI 92	26 W	BLACK
22203570-1241	CLD CELL-D-D	1.59	LED COB-2490lm-3000K-20°-CRI 92	26 W	SILVER
22203512-1241	CLD CELL-D-D	1.59	LED COB-3628lm-3000K-20°-CRI 92	39 W	WHITE
22203532-1241	CLD CELL-D-D	1.59	LED COB-3628lm-3000K-20°-CRI 92	39 W	BLACK
22203572-1241	CLD CELL-D-D	1.59	LED COB-3628lm-3000K-20°-CRI 92	39 W	SILVER
22203514-1241	CLD CELL-D-D	1.60	LED COB-4326lm-3000K-38°-CRI 92	45 W	WHITE
22203534-1241	CLD CELL-D-D	1.62	LED COB-4326lm-3000K-38°-CRI 92	45 W	BLACK
22203574-1241	CLD CELL-D-D	1.59	LED COB-4326lm-3000K-38°-CRI 92	45 W	SILVER
22203516-1241	CLD CELL-D-D	1.60	LED COB-4815lm-3000K-60°-CRI 92	53 W	WHITE
22203536-1241	CLD CELL-D-D	1.61	LED COB-4815lm-3000K-60°-CRI 92	53 W	BLACK
22203576-1241	CLD CELL-D-D	1.60	LED COB-4815lm-3000K-60°-CRI 92	53 W	SILVER
22203510-68	CLD CELL-D	1.60	LED COB-3146lm-4000K-20°-CRI 92	26 W	WHITE
22203530-68	CLD CELL-D	1.59	LED COB-3146lm-4000K-20°-CRI 92	26 W	BLACK
22203570-68	CLD CELL-D	1.59	LED COB-3146lm-4000K-20°-CRI 92	26 W	SILVER
22203512-68	CLD CELL-D	1.59	LED COB-3882lm-4000K-20°-CRI 92	39 W	WHITE
22203532-68	CLD CELL-D	1.57	LED COB-3882lm-4000K-20°-CRI 92	39 W	BLACK
22203572-68	CLD CELL-D	1.59	LED COB-3882lm-4000K-20°-CRI 92	39 W	SILVER
22203514-68	CLD CELL-D	1.60	LED COB-4629lm-4000K-38°-CRI 92	45 W	WHITE
22203534-68	CLD CELL-D	1.62	LED COB-4629lm-4000K-38°-CRI 92	45 W	BLACK

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

Focus with lens

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22203574-68	CLD CELL-D	1.59	LED COB-4629lm-4000K-38°-CRI 92	45 W	SILVER
22203516-68	CLD CELL-D	1.62	LED COB-5152lm-4000K-60°-CRI 92	54 W	WHITE
22203536-68	CLD CELL-D	1.61	LED COB-5152lm-4000K-60°-CRI 92	53 W	BLACK
22203576-68	CLD CELL-D	1.60	LED COB-5152lm-4000K-60°-CRI 92	53 W	SILVER
22203510-6841	CLD CELL-D-D	1.51	LED COB-3146lm-4000K-20°-CRI 92	26 W	WHITE
22203530-6841	CLD CELL-D-D	1.59	LED COB-3146lm-4000K-20°-CRI 92	26 W	BLACK
22203570-6841	CLD CELL-D-D	1.59	LED COB-3146lm-4000K-20°-CRI 92	26 W	SILVER
22203512-6841	CLD CELL-D-D	1.59	LED COB-3882lm-4000K-20°-CRI 92	39 W	WHITE
22203532-6841	CLD CELL-D-D	1.60	LED COB-3882lm-4000K-20°-CRI 92	39 W	BLACK
22203572-6841	CLD CELL-D-D	1.60	LED COB-3882lm-4000K-20°-CRI 92	39 W	SILVER
22203514-6841	CLD CELL-D-D	1.60	LED COB-4629lm-4000K-38°-CRI 92	45 W	WHITE
22203534-6841	CLD CELL-D-D	1.62	LED COB-4629lm-4000K-38°-CRI 92	45 W	BLACK
22203574-6841	CLD CELL-D-D	1.59	LED COB-4629lm-4000K-38°-CRI 92	45 W	SILVER
22203516-6841	CLD CELL-D-D	1.60	LED COB-5152lm-4000K-60°-CRI 92	53 W	WHITE
22203536-6841	CLD CELL-D-D	1.61	LED COB-5152lm-4000K-60°-CRI 92	53 W	BLACK
22203576-6841	CLD CELL-D-D	1.60	LED COB-5152lm-4000K-60°-CRI 92	53 W	SILVER

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated