

Matrix Q4 Dark "D" - base



This version features a particular shape and a design with clean lines that can meet different architectonic lighting needs using high colour rendering LEDs. It is an all-new spotlight, which is entirely adjustable for an extraordinarily effective lighting project that adds value to any space and object. Housing: in die-cast aluminium. Optic compartment: front in black polycarbonate (the white colour version is available upon request). Lens: in PMMA with high efficiency output and very low glare rate. Equipment: supplied with universal adapter in track mounted versions. Regulations: Manufactured in accordance with EN 60598-1-CEI 34.21 standards. Degree of protection in accordance with EN60529 standards.

LED: High-efficiency light sources (CRI 90).


Luminous flux maintenance L80B20: 50.000h.

Power factor >0.95

Photobiological safety class: Exempt group

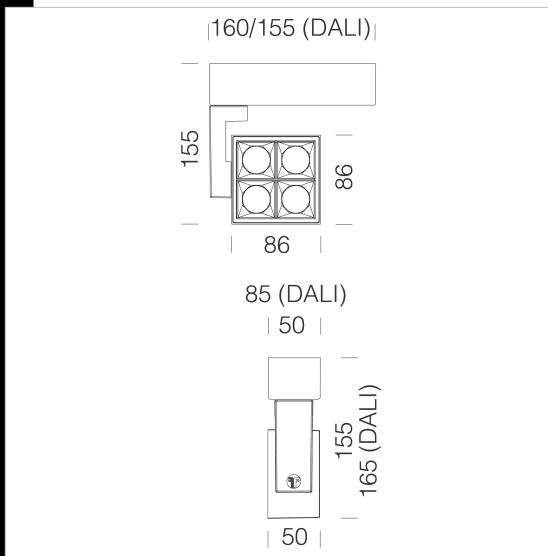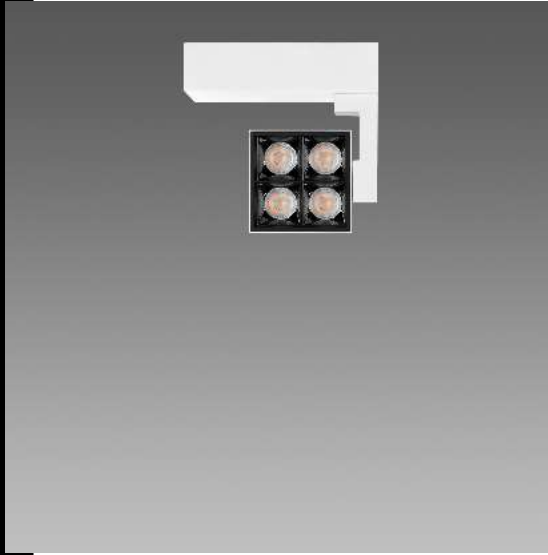

| Code | Gear | Kg | Lumen Output-K-CRI | WTot | Colour |
|---------------|---------|------|-----------------------------|------|--------|
| 22203710-00 | CLD | 0,71 | LED-1202lm-4000K-16°-CRI>90 | 19 W | WHITE |
| 22203710-39 | CLD | 0,71 | LED-1123lm-3000K-16°-CRI>90 | 19 W | WHITE |
| 22203710-1241 | CLD-D-D | 0,71 | LED-1202lm-4000K-16°-CRI>90 | 19 W | WHITE |
| 22203710-3941 | CLD-D-D | 0,71 | LED-1123lm-3000K-16°-CRI>90 | 19 W | WHITE |
| 22203711-00 | CLD | 0,71 | LED-1558lm-4000K-16°-CRI>90 | 19 W | WHITE |
| 22203711-39 | CLD | 0,71 | LED-1456lm-3000K-16°-CRI>90 | 19 W | WHITE |
| 22203711-1241 | CLD-D-D | 0,71 | LED-1558lm-4000K-16°-CRI>90 | 19 W | WHITE |
| 22203711-3941 | CLD-D-D | 0,71 | LED-1456lm-3000K-16°-CRI>90 | 19 W | WHITE |
| 22203712-00 | CLD | 0,71 | LED-1652lm-4000K-16°-CRI>90 | 19 W | WHITE |
| 22203712-39 | CLD | 0,71 | LED-1543lm-3000K-16°-CRI>90 | 19 W | WHITE |
| 22203712-1241 | CLD-D-D | 0,71 | LED-1652lm-4000K-16°-CRI>90 | 19 W | WHITE |
| 22203712-3941 | CLD-D-D | 0,71 | LED-1543lm-3000K-16°-CRI>90 | 0 W | WHITE |

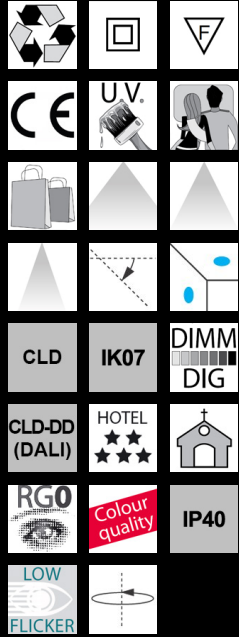

Download

DXF 2D
- mq4d.dxf

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated