


Download

- DXF 2D
- matfocusbas.dxf
- 3DS
- fosnova_matrix_focus.3ds
- 3DM
- fosnova_matrix_focus.3dm
- Montaggi
- FOCUS rev6.pdf

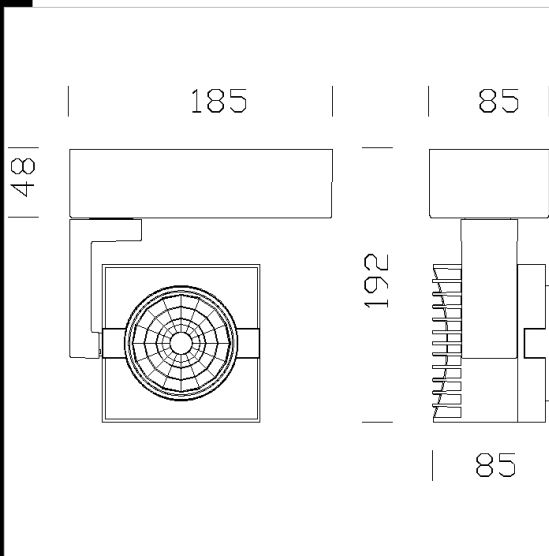

Focus - base

This version features a particular shape and a design with clean lines that can meet different architectonic lighting needs using high colour rendering LEDs. It is an all-new spotlight, which is entirely adjustable for an extraordinarily effective lighting project that adds value to any space and object

Housing: in die-cast aluminium with anodised heat sink.

Version with reflector: in die-cast polished aluminium, high efficiency and anti-glare.

Coating: UV-resistant acrylic resin powder coating.

Standard: manufactured pursuant to EN 60598-1-CEI 34.21 and with a degree of protection pursuant to EN 60529.

on request: 31° - 52°

Luminous flux maintenance 50.000h (L80B20).

Power factor >0.95

Photobiological safety class: exempt group EN62471.

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated