


Download

DXF 2D
- navig.dxf

3DS
- fosnova_navigator.3ds

3DM
- fosnova_navigator.3dm

Montaggi
- navigator.pdf

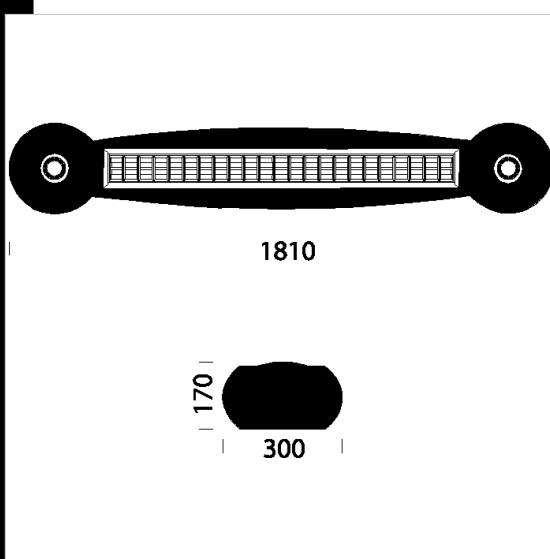

Navigator 1 - SPOT Low Glare - Design Paolo Bistacchi

Outer casing: made of plastic material, available in different colours, including semi-transparent shades for the LED and LED RGB versions.

Inner casing: in sheet steel, 6/10 thick, white polyester powder coating, UV stabilized. Metal silver outer edge.

Optics: Dark light double parabolic louvres, lengthwise and crosswise in high-reflection aluminium, anti-reflection and anti-iridescence multi layer PVD treatment, very low luminance.

Regulations: manufactured in compliance with EN60598-1 CEI 34/21 standards. Protection levels comply with EN60529 standards.

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22212016-00	CLD CELL	10.00	LED +1 Low Glare-2640lm-4000K + 3000K-CRI>80	45 W	BIANCO
22212011-00	CLD CELL	10.00	LED 21W 1+1 Low Glare 8W-2640lm-4000K + 3000K-CRI>80	45 W	BIANCO
22212014-00	CLD CELL	10.60	LED 1+1 Low Glare-6490lm + 800lm-4000K + 3000K-CRI>80	73 W	BIANCO
22212018-00	CLD CELL	9.83	LED 1+1 Low Glare-8650lm + 800lm-4000K + 3000K-CRI>80	73 W	BIANCO

Accessories



- Ceiling suspension



- Powered suspension 3-5 p

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated