


## Navigator 3 - SPOT 230V LED + LED strip 5400K - Design Paolo Bistacchi

Outer casing: made of plastic material, available in different colours, including semi-transparent shades for the LED and LED RGB versions.

Inner casing: in sheet steel, 6/10 thick, white polyester powder coating, UV stabilized. Metal silver outer edge.

Optics: Dark light double parabolic louvres, lengthwise and crosswise in high-reflection aluminium, anti-reflection and anti-iridescence multi layer PVD treatment, very low luminance.

Regulations: manufactured in compliance with EN60598-1 CEI 34/21 standards. Protection levels comply with EN60529 standards.

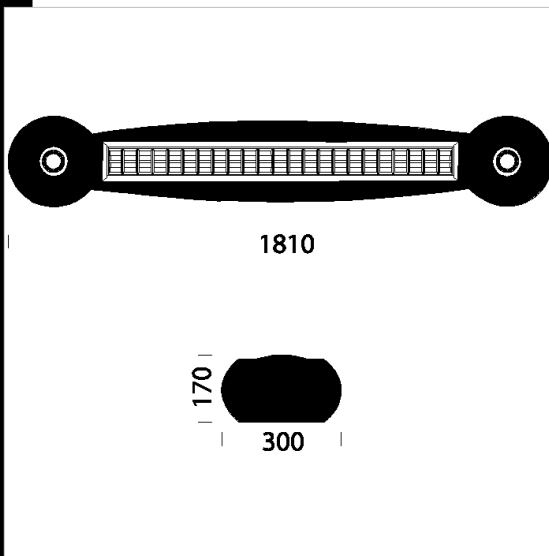

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Base	Colour
22212214-12	CLD CELL	10,00	FL 1x54 + 2xLow Glare 7w---	197 W	G5+GU10	WHITE
22212215-12	CLD CELL	11,00	FL 2x54 + 2xLow Glare 7w---	224 W	G5+GU10	WHITE

### Accessori



- Ceiling suspension



- Powered suspension 3-5 p



### Download

DXF 2D  
- navig.dxf

3DS  
- fosnova\_navigator.3ds

3DM  
- fosnova\_navigator.3dm

Montaggi  
- navigator.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated