

Compendio G

In large areas and shopping centres, the light should be agreeable to the eye, and enhance the characteristics of the products on display. The reflector's design is also critical: it should be pleasant looking and blend harmoniously with the surroundings. These are the requirements we had in mind when we created the Compendio series.

Housing: Die-cast aluminium with cooling fins.


Diffuser: clear polycarbonate with a silk finish, metal-coated inside and painted outside.

Coating: Humidity resistant acrylic-resin liquid paint, UV-stabilised.

Lampholder: Ceramic with silver-plated contacts, or polycarbonate with phosphor bronze contacts

Electric gear: 230V-50Hz power supply with thermal protection. Hard wire, 0.50 sqmm cross section, high-temperature resistant (90°C) PVC-HT sheath in accordance with CEI 20-20 standards. 2P+T terminal block (maximum allowed lead cross section 2.5 sqmm.)

Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

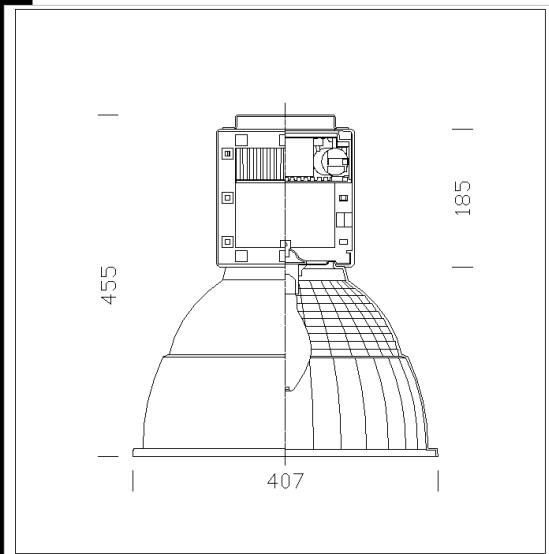

Download

DXF 2D
- 221271.dxf

3DS
- compendio g1.3ds

3DM
- compendio g1.3dm

Montaggi
- COMPENDIO A-G-G1-S AGG.07-03 bid.pdf

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
22221273-00	CELL	2.00	FLC 1x57T/E-4300lm-3000K-Ra 1b	63 W	Gx24q-5	ARGENTO
22221272-12	CELL-D	3.52	FLC 1x42T/E-3200lm-3000K-Ra 1b	45 W	Gx24q-4	ARGENTO
22221271-00	CELL	3.84	JM-E 150-13300lm-3200K-Ra 1b	160 W	E27	ARGENTO
22221272-00	CELL	3.52	FLC 1x42T/E-3200lm-3000K-Ra 1b	47 W	Gx24q-4	ARGENTO

Accessories



- Ceiling suspension



- Two lamp powered hanger

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated