



Compendio G1

In large areas and shopping centres, the light should be agreeable to the eye, and enhance the characteristics of the products on display. The reflector's design is also critical: it should be pleasant looking and blend harmoniously with the surroundings. These are the requirements we had in mind when we created the Compendio series.

Housing: Die-cast aluminium with cooling fins.


Diffuser: clear polycarbonate with a silk finish, metal-coated inside and painted outside.

Coating: Humidity resistant acrylic-resin liquid paint, UV-stabilised .

Lampholder: Ceramic with silver-plated contacts, or polycarbonate with phosphor bronze contacts

Electric gear: 230V-50Hz power supply with thermal protection. Hard wire, 0.50 sqmm cross section, high-temperature resistant (90°C) PVC-HT sheath in accordance with CEI 20-20 standards. 2P+T terminal block (maximum allowed lead cross section 2.5 sqmm.)

Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

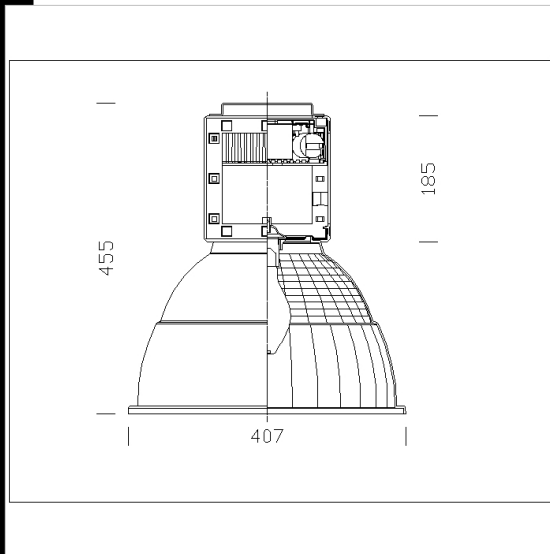

Download

DXF 2D
- 221275.dxf

3DS
- compendio g1.3ds

3DM
- compendio g1.3dm

Montaggi
- COMPENDIO A-G-G1-S AGG.07-03 bid.pdf

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
22221275-00	CELL	2.00	JM-E 150-13300lm-3200K-Ra 1b	160 W	E27	SILVER
22221276-00	CELL	3.50	FLC 1x42T/E-3200lm-3000K-Ra 1b	47 W	Gx24q-4	SILVER
22221276-12	CELL-D	3.50	FLC 1x42T/E-3200lm-3000K-Ra 1b	45 W	Gx24q-4	SILVER
22221277-00	CELL	3.54	FLC 1x57T/E-4300lm-3000K-Ra 1b	63 W	Gx24q-5	SILVER

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated