



**Download**

DXF 2D  
- 221376.dxf



## Compendio S

In large areas and shopping centres, the light should be agreeable to the eye, and enhance the characteristics of the products on display. The reflector's design is also critical: it should be pleasant looking and blend harmoniously with the surroundings. These are the requirements we had in mind when we created the Compendio series.


Housing: Die-cast aluminium with cooling fins.

Diffuser: clear polycarbonate with a silk finish, metal-coated inside and painted outside.

Coating: Humidity resistant acrylic-resin liquid paint, UV-stabilised .

Lampholder: Ceramic with silver-plated contacts, or polycarbonate with phosphor bronze contacts

Regulations: Manufactured in accordance with standards EN60598 - CEI 34 - 21. Degree of protection in accordance with standards EN60529.

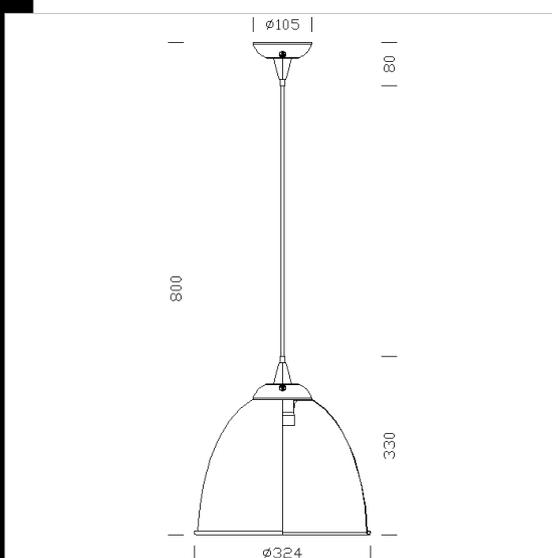

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22221370-00	CLD CELL	1.10	LED BULB-806lm-2700K-CRI 80	10 W	ARGENTO
22221377-00	CLD CELL-D	1.07	LED PAR30-1000lm-3000K-CRI 80	13 W	ARGENTO

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated