




Download
DXF 2D
- 221674.dxf



Bell 1C

Housing: Die-cast aluminium with cooling fins.
Diffuser: Turned anodised and polished aluminium.
Coating: Fluid-coated with a humidity resistant, UV-stabilised acrylic-resin paint.
Lampholder: Ceramic with silver-plated contacts, or polycarbonate with phosphorous bronze contacts.
Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

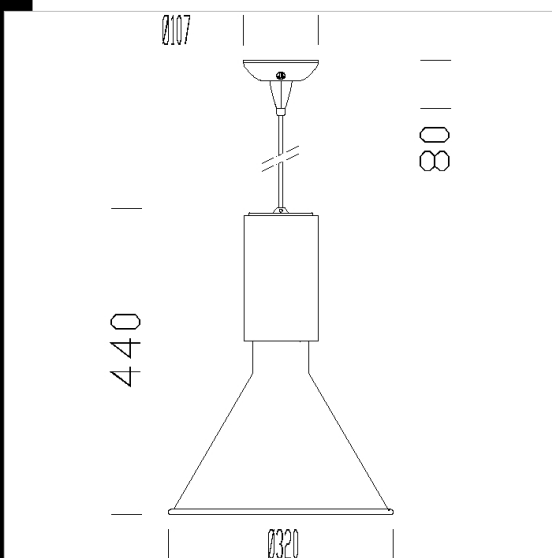

Code	Gear	Kg	Watt	Base	Lamps	Colour
22221674-00	CELL	2,85	FLC 1x32T/E	Gx24q-3	2400lm-3000K-Ra 1b	ALUMINIUM
22221676-00	CELL	2,00	FLC 1x42T/E	Gx24q-4	3200lm-3000K-Ra 1b	ALUMINIUM