




Download

DXF 2D
- 221772.dxf



Bell 3C

Housing: Die-cast aluminium with cooling fins.
 Diffuser: Turned anodised and polished aluminium.
 Coating: Fluid-coated with a humidity resistant, UV-stabilised acrylic-resin paint.
 Lampholder: Ceramic with silver-plated contacts, or polycarbonate with phosphorous bronze contacts.
 Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

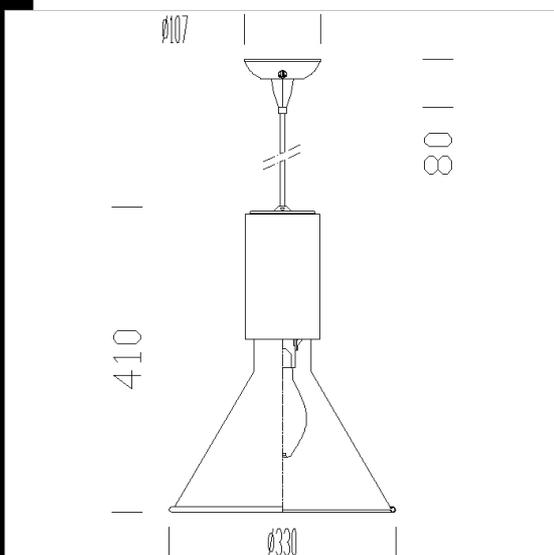

Code	Gear	Kg	Watt	Base	Lamps	Colour
22221772-00	CELL	2,90	JM-E 70	E27	5500lm-4200K-Ra 80	ALUMINIUM