


Bell 4 LED RGB

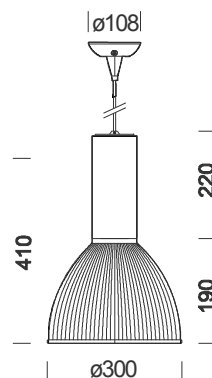

Code	Gear	Kg	Colour	Dimensions	lamp
22221970-00	CLD CELL	2.00	aluminium	0x0x410 Ø300	POWERLED RGB

Housing: Die-cast aluminium with cooling fins.

Diffuser: V2 self-extinguishing polycarbonate

Coating: Fluid-coated with a humidity resistant, UV-stabilised acrylic-resin paint.

Regulations: Manufactured in accordance with standards EN60598 - CEI 34 -21. Degree of protection in accordance with standards EN60529.

Complete with 6 LED modules from RGB 3.2W each. and IR sensor for the management of change color.