


info@fosnova.it - http://www.fosnova.it

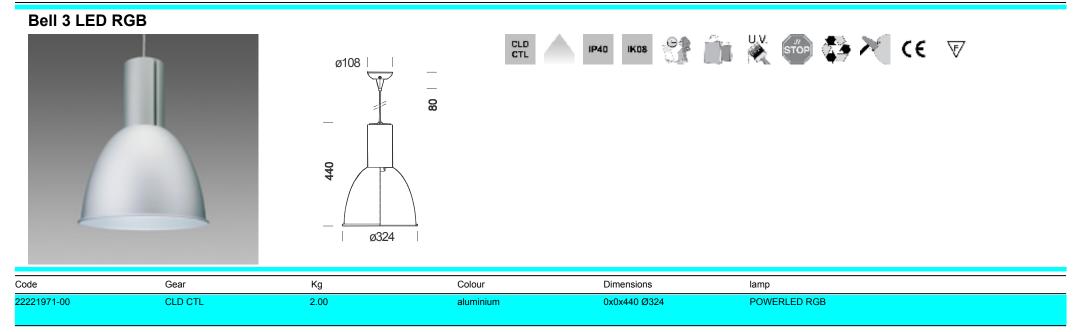

Housing: Die-cast aluminium with cooling fins.

Diffuser: Turned anodised and polished aluminium.

Coating: Fluid-coated with a humidity resistant, UV-stabilised acrylic-resin paint.

Regulations: Manufactured in accordance with standards EN60598 - CEI 34 -21. Degree of protection in accordance with standards EN60529.

Complete with 6 LED modules from RGB 3.2W each. and IR sensor for the management of change color.