


## Bell - LED Bulb

Housing: Die-cast aluminium with cooling fins.  
 Diffuser: Turned anodised and polished aluminium.  
 Coating: Fluid-coated with a humidity resistant, UV-stabilised acrylic-resin paint.  
 Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

### Download

DXF 2D  
 - bellbulb.dxf

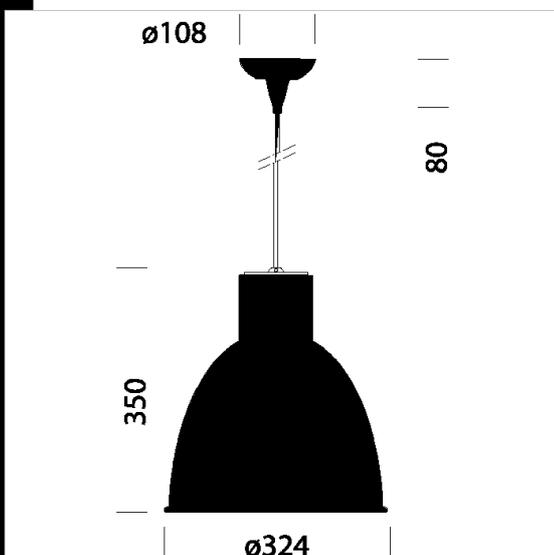

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22221973-00	CLD CELL	2.50	LED BULB-806lm-2700K-CRI 80	9 W	ALLUMINIO

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated