



Download


DXF 2D
- bellpar30.dxf



Bell Professional 1 - PAR30

Housing/diffuser: Die-cast aluminium. Equipment: complete with base and cable for suspension. LED: luminous flux maintenance L70B50: 50.000h. Power factor >0.9

Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

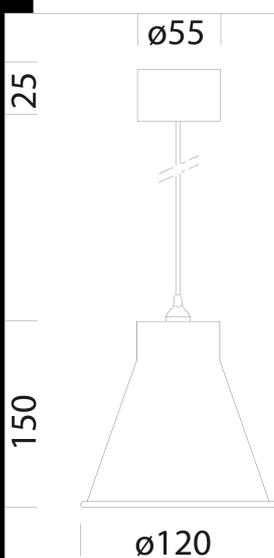

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22222410-00	CLD CELL-D	2.50	LED PAR30-1000lm-4000K-CRI 80	13 W	BIANCO
22222470-00	CLD CELL-D	0.36	LED PAR30-1000lm-4000K-CRI 80	13 W	ALLUMINIO
22222430-00	CLD CELL-D	2.50	LED PAR30-1000lm-4000K-CRI 80	13 W	NERO
22222460-00	CLD CELL-D	2.50	LED PAR30-1000lm-4000K-CRI 80	13 W	CROMATO
22222490-00	CLD CELL-D	2.50	LED PAR30-1000lm-4000K-CRI 80	13 W	ORO

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated