




**Download**

DXF 2D  
- bellpar38.dxf



**Bell Professional 2 - PAR38**

Housing/diffuser: Die-cast aluminium. Equipment: complete with base and cable for suspension. LED: luminous flux maintenance L70B50: 50.000h. Power factor >0.9  
Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

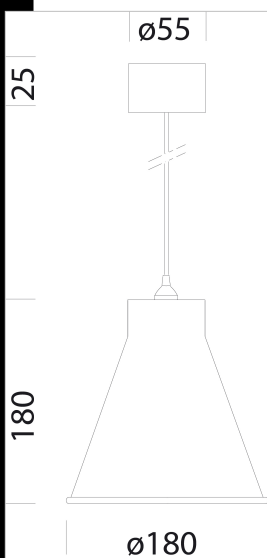

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22222530-00	CLD CELL-D	2,50	LED PAR38-1400lm-4000K-CRI 80	18 W	NERO
22222560-00	CLD CELL-D	2,50	LED PAR38-1400lm-4000K-CRI 80	18 W	CROMATO

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated