



Gotham MASTERLED AR111

More and more frequently, exhibition areas involve an accurate selection of light, colour, equipment. The proper mix of these elements creates communication; but true entertainment begins with light. The settings, the colours and positions of displayed products may vary, but the lighting system is hardly ever adapted to every single change.

Housing: Die-cast aluminium with wide cooling fins.

Coating: Powder coated with UV-resistant polyester epoxy paint, .

Standard supply: Only supplied with an aluminium bracket for attaching the base or the track mounting adapter.

Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.


LED 11W - 2700K - 555lm - 40° - CRI 90 - DIMM iabt

LED 15W - 3000K - 770lm - 24° - CRI 80 - DIMM iagt

Luminous flux maintenance L70B50: 40.000h.

Power factor  $>0.9$ 

Photobiological safety class: exempt group EN62471.

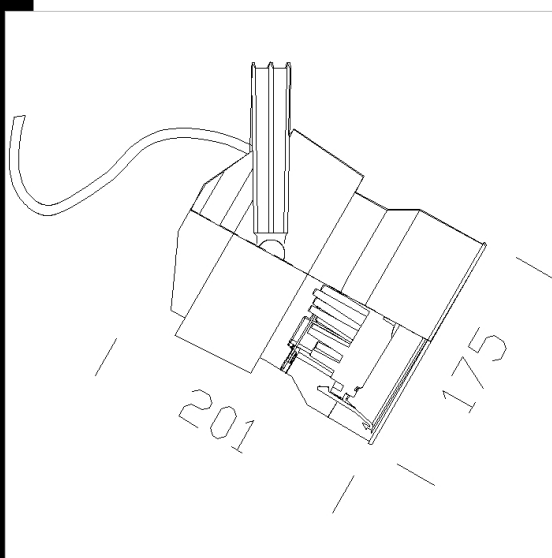

Code	Gear	Kg	Watt	Base	Lamps	Colour
22260372-00	CLD CELL-D	1,90	MASTERLED AR111 11W		550lm-2700K - 40°-CRI 90	SILVER
22260373-00	CLD CELL-D	1,85	MASTERLED AR111 15W		770lm-3000K - 24°-CRI 80	SILVER

## Accessori



- Mechanical + power adapter



- Universal adapter +



- Base