




Staight joint

In steel and fibreglass nylon. For suspension, rotation on the fixtures own axis and mounting in a continuous line of acc. 15974.

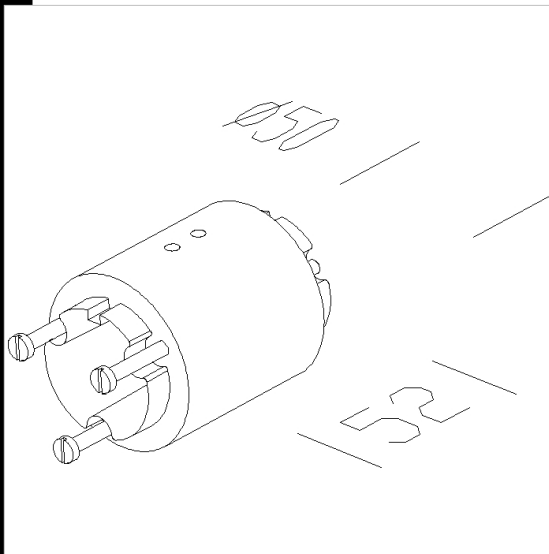

Code	Kg	WTot	Colour
22271530-00	0.15	0 W	BLACK
22271572-00	0.16	0 W	SILVER

Products



- Structur Omnitrack

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated