



Download

DXF 2D
- 281275.dxf



Compendio AR double

With its extreme versatility, Compendio offers a range of installation options: wall, ceiling, suspension, lamp-stand, single or in multiple sequence. It can also be recessed by using the separate frame.

Housing: Die-cast aluminium, with gear box encased inside the structure.

Reflector: For Mastercolour lamp, built from oxidised and polished 99.85 aluminium.

Diffuser: Frosted tempered glass.

Coating: Acrylic-resin liquid paint, UV-stabilised after a 6-stage chromate treatment.

Lampholder: Ceramic, with silver-plated contacts.


Electric gear: 230V/50Hz supply with 12V traditional ballast. Silicone wire with fibreglass braid, cross-section: 1.5 sqmm.

Standard supply: Includes electric cable (l.= 500mm).

Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

Lamps: Supplied with AR111 lamps.

This version is composed of 2 cubes equipped with lamps and a single box containing the transformer.

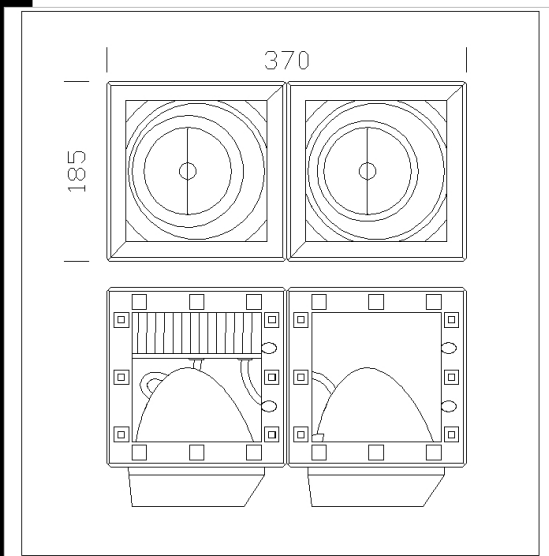

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
22281275-00	CTL	4.30	AR111 2x50IRC-5800cd-3000K-Ra 100	105 W	G53	SILVER
22281276-00	CTL	4.35	AR111 65IRC-8500cd-3000K-Ra 100	120 W	G53	SILVER

Accessories



- Ceiling suspension



- Coloured filter



- Glass printed



- Branch box



- Vertebra



- Conveyor

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated