



Liset 2.0 - ceiling - comfort optics - UGR<19

Liset 2.0 is a linear and modular lighting system that is easily customisable and capable of offering a series of lighting solutions in any setting, including retailing, artistic and cultural spaces or in entrance lobbies and/or hospitality facilities. Compact, elegant, flexible and small, Liset 2.0 is simple to install as a recessed, ceiling, suspension or track lamp. It is available in three versions: with dark light lamellar optics with UGR<19, or with either white or black polycarbonate comfort optics and polycarbonate opal diffuser. The entire range has latest generation 4000K LED sources with 80 and 90 CRI, making these products easy to fit into any lighting design project.

Liset 2.0 is a real multi-purpose lighting system studied to make the best use of the LED technology. Its clean lines and luminous efficiency ensure extraordinary light and colour effects.

The system's extreme flexibility is guaranteed by the numerous compositions that can be made using the angular module to create ALL LIGHT solutions, which can offer uniform lighting of the space and constant visual comfort.

The system's main feature is the possibility to integrate a wide selection of additional recessed lights, ceiling spotlights and projectors from the Matrix Q series. Thanks to the different combinations of power, lumen, light beams and aesthetic finishes, Liset 2.0 System can perfectly fit into any architectural structure, enhancing both the showroom space and the items on display.

Housing: made of extruded aluminium. Heads: in die cast aluminium. LED: Luminous flux maintenance 80%: 50.000h (L80B20). Power factor: 0,92. Photobiological safety class: Exempt group.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards.

Optics: in black anti-glare polycarbonate for improved visual comfort (the white colour version is available upon request).

Download


DXF 2D
- 302104.dxf

Montaggi

- composition.pdf
- LISET 2.0 sosp.plaf. rev3.pdf

BIM

- ceiling - comfort optics - CRI 90 - 1135mm - 20200519.zip
- ceiling - comfort optics - CRI 90 - 1415mm - 20200519.zip
- ceiling - comfort optics - CRI 90 - 575mm - 20200519.zip

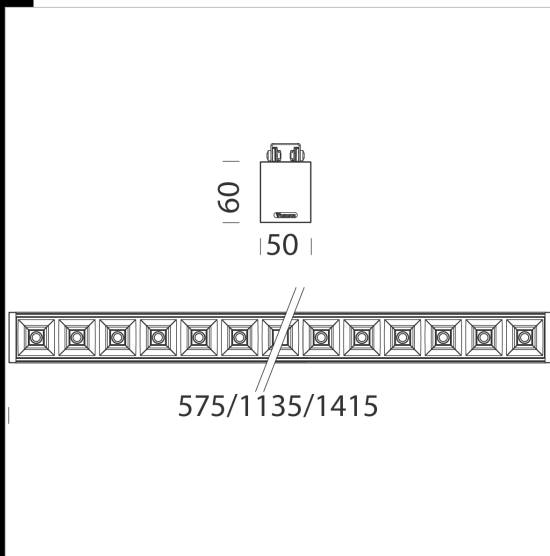

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22302104-00	CLD	1,78	LED-2486lm-4000K-54°-CRI 80	18 W	WHITE
22302134-00	CLD	1,74	LED-2486lm-4000K-54°-CRI 80	18 W	BLACK
22302104-39	CLD	3,06	LED-2405lm-3000K-54°-CRI 80	18 W	WHITE
22302134-39	CLD	1,74	LED-2405lm-3000K-54°-CRI 80	18 W	BLACK
22302105-00	CLD	3,06	LED-3250lm-4000K-54°-CRI 80	22 W	WHITE
22302135-00	CLD	3,26	LED-3250lm-4000K-54°-CRI 80	22 W	BLACK
22302105-39	CLD	3,06	LED-3144lm-3000K-54°-CRI 80	22 W	WHITE
22302135-39	CLD	3,06	LED-3144lm-3000K-54°-CRI 80	22 W	BLACK
22302106-00	CLD	3,06	LED-4561lm-4000K-54°-CRI 80	30 W	WHITE
22302136-00	CLD	3,60	LED-4561lm-4000K-54°-CRI 80	30 W	BLACK
22302106-39	CLD	3,06	LED-4413lm-3000K-54°-CRI 80	30 W	WHITE
22302136-39	CLD	3,88	LED-4413lm-3000K-54°-CRI 80	30 W	BLACK
22302104-1241	CLD-D-D	3,06	LED-2486lm-4000K-54°-CRI 80	18 W	WHITE
22302134-1241	CLD-D-D	1,73	LED-2486lm-4000K-54°-CRI 80	18 W	BLACK
22302104-3941	CLD-D-D	3,06	LED-2405lm-3000K-54°-CRI 80	18 W	WHITE
22302134-3941	CLD-D-D	1,60	LED-2405lm-3000K-54°-CRI 80	18 W	BLACK
22302105-1241	CLD-D-D	3,06	LED-3250lm-4000K-54°-CRI 80	22 W	WHITE
22302135-1241	CLD-D-D	3,27	LED-3250lm-4000K-54°-CRI 80	22 W	BLACK
22302105-3941	CLD-D-D	3,06	LED-3144lm-3000K-54°-CRI 80	22 W	WHITE
22302135-3941	CLD-D-D	3,06	LED-3144lm-3000K-54°-CRI 80	22 W	BLACK
22302106-1241	CLD-D-D	3,96	LED-4561lm-4000K-54°-CRI 80	30 W	WHITE
22302136-1241	CLD-D-D	3,94	LED-4561lm-4000K-54°-CRI 80	30 W	BLACK
22302106-3941	CLD-D-D	3,06	LED-4413lm-3000K-54°-CRI 80	30 W	WHITE
22302136-3941	CLD-D-D	3,06	LED-4413lm-3000K-54°-CRI 80	30 W	BLACK

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

Accessori



- Angular module - ALL LIGHT - ceiling



- S angle module - suspension - ceiling



- S module for linear ceiling installation