



## Liset 2.0 - suspension - direct/indirect light - with polycarbonate diffuser

Liset 2.0 is a linear and modular lighting system that is easily customisable and capable of offering a series of lighting solutions in any setting, including retailing, artistic and cultural spaces or in entrance lobbies and/or hospitality facilities. Compact, elegant, flexible and small, Liset 2.0 is simple to install as a recessed, ceiling, suspension or track lamp. It is available in three versions: with dark light lamellar optics with URG<19, or with either white or black polycarbonate comfort optics and polycarbonate opal diffuser. The entire range has latest generation 4000K LED sources with 80 and 90 CRI, making these products easy to fit into any lighting design project.

Liset 2.0 is a real multi-purpose lighting system studied to make the best use of the LED technology. Its clean lines and luminous efficiency ensure extraordinary light and colour effects.

The system's extreme flexibility is guaranteed by the numerous compositions that can be made using the angular module to create ALL LIGHT solutions, which can offer uniform lighting of the space and constant visual comfort.


The system's main feature is the possibility to integrate a wide selection of additional recessed lights, ceiling spotlights and projectors from the Matrix Q series. Thanks to the different combinations of power, lumen, light beams and aesthetic finishes, Liset 2.0 System can perfectly fit into any architectural structure, enhancing both the showroom space and the items on display.

Housing: made of extruded aluminium. Heads: in die cast aluminium. LED: Luminous flux maintenance 80%: 50.000h (L80B20). Power factor: 0,92. Photobiological safety class: Exempt group.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards.

Diffuser: in polycarbonate opal.

Suspensions not included, to be purchased separately.

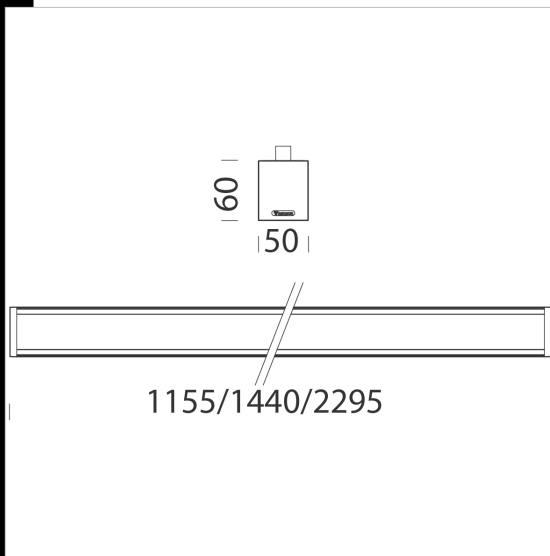

### Download

DXF 2D  
- 302208.dxf

Montaggi  
- LISET 2.0 sosp.plaf. rev3.pdf  
- composition.pdf

Codice	Cablaggio	Kg	Lumen-K-CRI	WTot	Colore
22302211-00	CLD	3.18	LED-3779lm-4000K-CRI 80 LED-3779lm-4000K-CRI 80	42 W	BIANCO
22302231-00	CLD	3.06	LED-3779lm-4000K-CRI 80 LED-3779lm-4000K-CRI 80	42 W	NERO
22302212-00	CLD	4.83	LED-6662lm-4000K-CRI 80 LED-6662lm-4000K-CRI 80	72 W	BIANCO
22302232-00	CLD	4.81	LED-6662lm-4000K-CRI 80 LED-6662lm-4000K-CRI 80	72 W	NERO
22302211-1241	CLD-D-D	3.22	LED-3779lm-4000K-CRI 80 LED-3779lm-4000K-CRI 80	42 W	BIANCO
22302231-1241	CLD-D-D	3.06	LED-3779lm-4000K-CRI 80 LED-3779lm-4000K-CRI 80	42 W	NERO
22302212-1241	CLD-D-D	4.97	LED-6662lm-4000K-CRI 80 LED-6662lm-4000K-CRI 80	72 W	BIANCO
22302232-1241	CLD-D-D	3.06	LED-6662lm-4000K-CRI 80 LED-6662lm-4000K-CRI 80	72 W	NERO

### Accessori



- Ceiling suspension



- 5P Powered suspension



- 5P WIRELESS Powered suspension



- Suspension attachment for track



- Joining bracket - Liset 2.0



- S module for linear suspension



- S angle module - suspension - ceiling



- Angular module - ALL LIGHT - suspension

Il flusso luminoso riportato indica il flusso uscente dall'apparecchio con una tolleranza di  $\pm 10\%$  rispetto al valore indicato. I W tot sono la potenza totale assorbita dal sistema e non supera il 10% del valore indicato.