




Download
DXF 2D
- 302208c.dxf

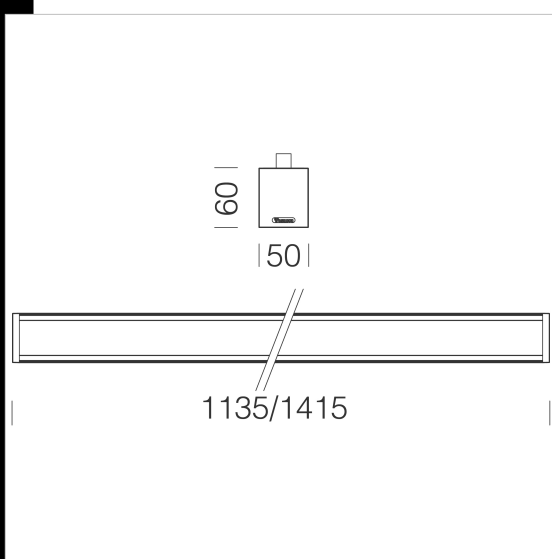

Liset 2.0 TW - suspension - direct - with polycarbonate diffuser

Housing: made of extruded aluminium. Heads: in die cast aluminium. LED: Luminous flux maintenance 80%: 50.000h (L80B20). Power factor: 0,92. Photobiological safety class: Exempt group.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards.

Diffuser: in polycarbonate opal.

colourSWITCH function

A conventional pushbutton can be used to control the system via colourSWITCH. Use of pushbutton with indicator lamp is not permitted. If the device is controlled via DALI/DSI, colourSWITCH is not available. For control via a pushbutton different settings can be made:

- Short press: setting the colour temperature via colourSWITCH mode with 9 values between 2,700 and 6,500 K.
- Long press (> 1 s): stepless setting of colour temperature.

After completion the colour temperature direction will be inverted. In installations with LED Drivers with different colour temperature or opposite colour temperature directions (e.g. after a system extension), all LED Drivers can be synchronized to 4,500 K by a 10 s push.

switchDIM function

Integrated switchDIM function allows a direct connection of a pushbutton for dimming and switching. Brief push (< 0.6 s) switches LED Driver ON and OFF. The dim level is saved at power-down and restored at power-up. When the pushbutton is held, LED modules are dimmed. After releasing and pushing the LED modules are dimmed in the opposite direction. In installations with LED Drivers with different dimming levels or opposite dimming directions (e.g. after a system extension), all LED Drivers can be synchronized to 50 % dimming level by a 10 s push. Use of pushbutton with indicator lamp is not permitted.

- Possibility of manual selection of light colour throughout the day
- No circadian cycle

Suspensions not included, to be purchased separately.

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22302208-0024	CLD-D-D	3.29	LED-2986lm-2700K-6500K-CRI 90	40 W	WHITE
22302238-0024	CLD-D-D	2.43	LED-2986lm-2700K-6500K-CRI 90	40 W	BLACK
22302209-0024	CLD CELL-D-D	3.07	LED-3732lm-2700K-6500K-CRI 90	40 W	WHITE
22302239-0024	CLD-D-D	3.06	LED-3732lm-2700K-6500K-CRI 90	40 W	BLACK

Accessories



- Ceiling suspension



- Ceiling suspension Q



- Powered suspension Q



- Suspension attachment for



- Jointing bracket - Liset 2.0

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated