



## BoreaLED


Ideal for installation under kitchen cabinets, above bathroom mirrors, inside wardrobes, walk-in closets, corridors, etc. Housing: in polycarbonate. Diffusore: in polycarbonate. Equipment: complete with ON/OFF switch and power cable. LED: Luminous flux maintenance L70B50: 30.000h. Power cable included.

Other installation accessories included: 1) bracket for wall mounting 2) bracket for ceiling mounting 3) end cap 4) connector for continuous line mounting 5) connector with wire for continuous line mounting

### Download

DXF 2D  
- borealed.dxf

Montaggi  
- BOREALED rev2.pdf  
- borealed mont.dxf

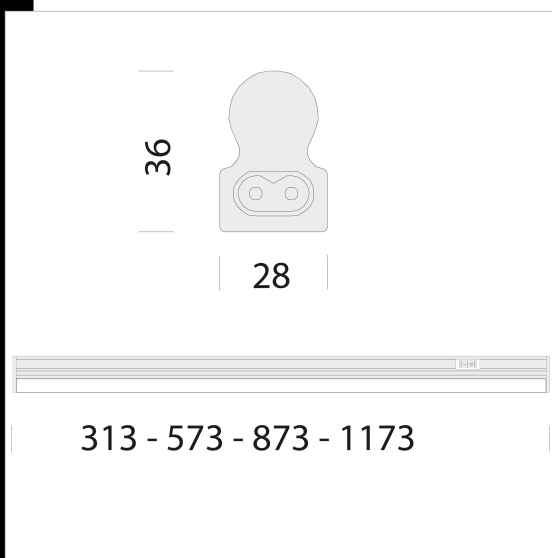

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22321010-00	CLD	0,20	LED-441lm-4000K-CRI>80	4 W	WHITE
22321011-00	CLD	0,26	LED-883lm-4000K-CRI>80	8 W	WHITE
22321012-00	CLD	0,20	LED-1215lm-4000K-CRI>80	11 W	WHITE
22321013-00	CLD	0,37	LED-1546lm-4000K-CRI>80	14 W	WHITE
22321010-39	CLD	0,20	LED-410lm-3000K-CRI>80	4 W	WHITE
22321011-39	CLD	0,25	LED-821lm-3000K-CRI>80	8 W	WHITE
22321012-39	CLD	0,30	LED-1130lm-3000K-CRI>80	11 W	WHITE
22321013-39	CLD CELL	0,37	LED-1438lm-3000K-CRI>80	14 W	WHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated